



· · @ c k · J : · 6 f] X [Y · F Y W h] Z] Y f g ·

..... : Y U h i f Y g ·

UL recognition, file #E230084
based on silicon planar process
Ideal for printed circuit boards
High surge current capability
Low VF
Solder dip 275 °C max. 7 s, per JESD 22-B106

..... H m d] W U · · 5 d d ·] W U h] c b g ·

General purpose use in AC/DC bridge full wave rectification
for switching power supply, home appliances, office
equipment, industrial automation applications.

· · A Y W \ U b] W U · · 8 U h U ·

D U W _ U [Y : G B U
Molding compound meets



· ; 6 I I &) \$ * ·

9`YWhf]WU`7\UfUWhYf]gh]Wg Ta=25 Unless otherwise specified

D5F5A9H9F`	GMA6C@	IB-H`	H9GH`7CB8-H-CBG`	A]b`	Hmd`	AUI`
Instantaneous forward voltage drop per diode	V _F	V	I _{FM} =12.5A	0.80	0.875	0.92
DC reverse current at rated DC blocking voltage per diode	I _R	μA	T _j =25	-	0.01	5
			T _j =125	-	3.5	50
Junction capacitance	C _j	pF	Measured at 1MHz and Applied Reverse Voltage of 4.0 V.D.C	150	185	250

H\Yf a U`7\UfUWhYf]gh]Wg Ta=25 Unless otherwise specified


D5F5A9H9F`		GMA6C@	IB-H`	; 6 I I &) \$ *
Thermal Resistance	Between junction and ambient, Without heatsink	R _{J-A}	/W	25.0
	Between junction and case, With heatsink	R _{J-C}		0.6
	Between junction and Lead With heatsink	R _{J-L}		4.0

Note: Device mounted on 75mm x 45mm x 5.5mm Aluminum Plate Heatsink.

CfXYf]b [`:bZcf a Uh]cb` (Example)

DF9 : 9F98`D#B`	D57 ? :B ; `` 7C89`	IB-H` K9: ; <Hfl [L	A=B=A I A` D57 ? 5 ; 9fidWgt	:BB9F`6CL` E I 5BH-HMfidWgt	C I H9F`7 5FHCB` E I 5BH-HMfidWgt`	89@=:J9FM`AC89
GBUU2506	B1	Approximate 3.96	20	1000	2000	TUBE

7\UfUWhYf]gh]Wg(Typical)

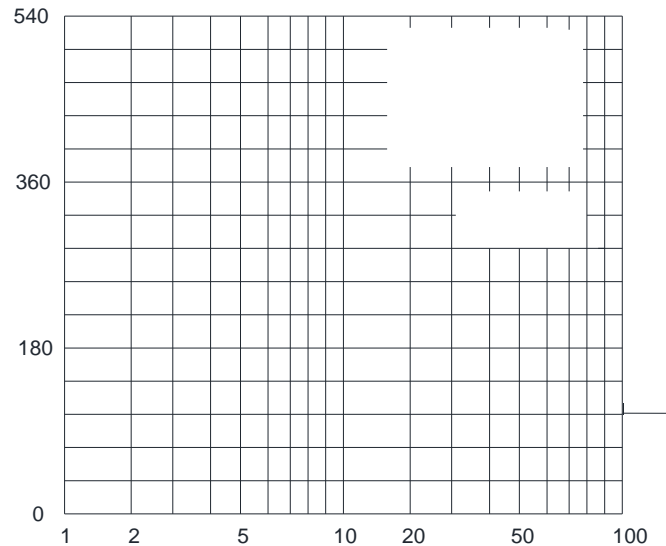



· ; 6 I I &) \$ * ·

8]gW'U]a Yf'

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.