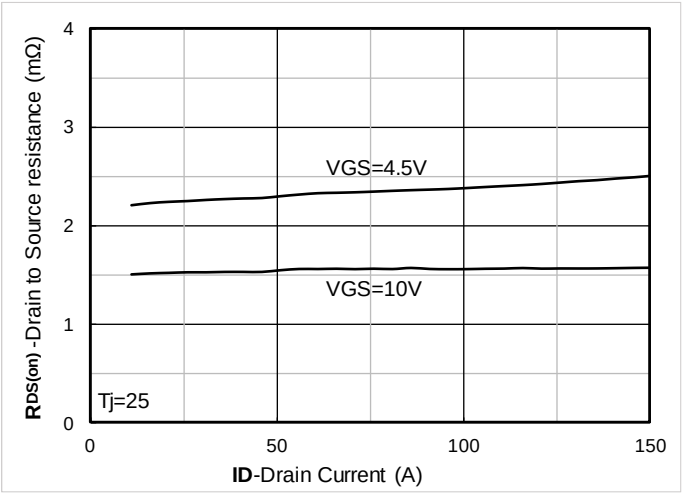

Figure 7. $R_{DS(on)}$ VS Drain Current

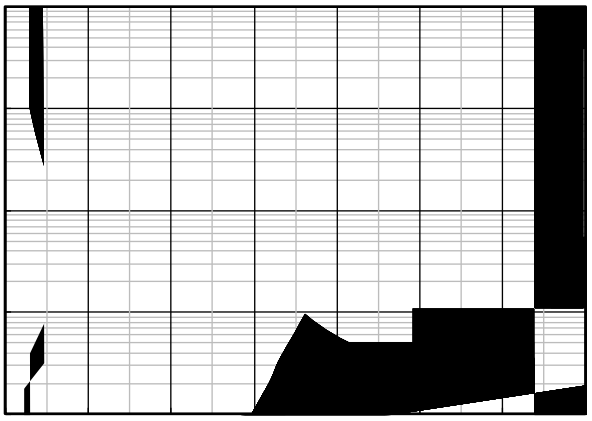

Figure 8. Forward characteristics of reverse diode

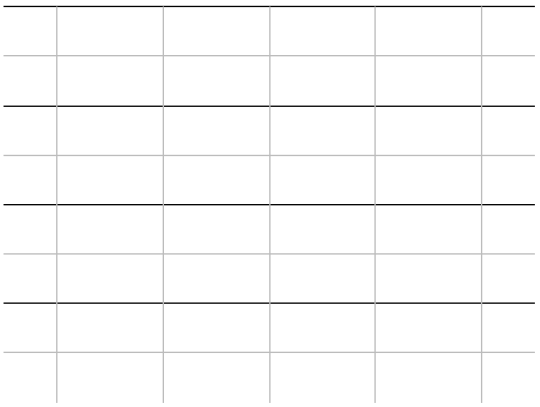

Figure 9. Normalized breakdown voltage

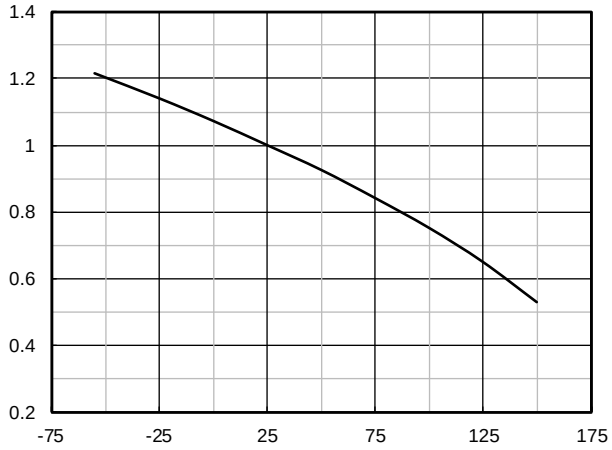

Figure 10. Normalized Threshold voltage

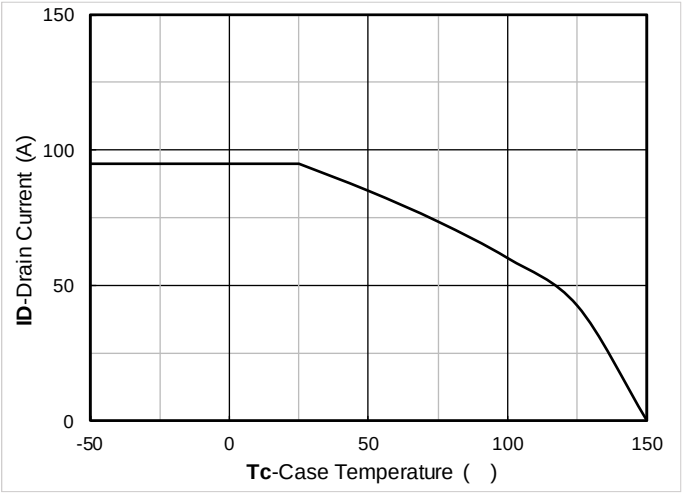

Figure 11. Current dissipation

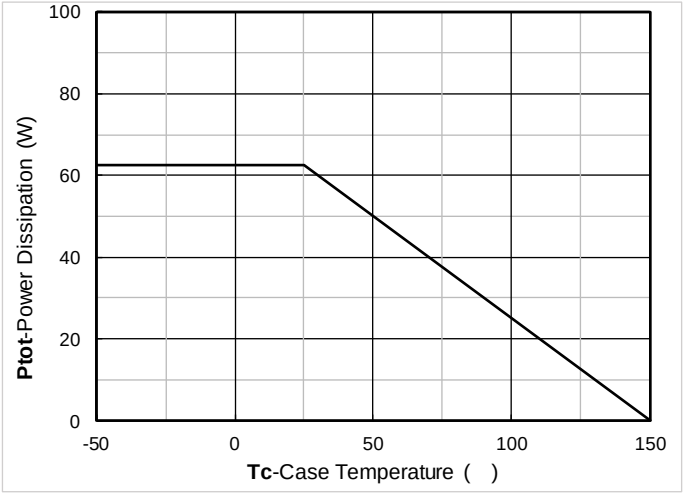

Figure 12. Power dissipation

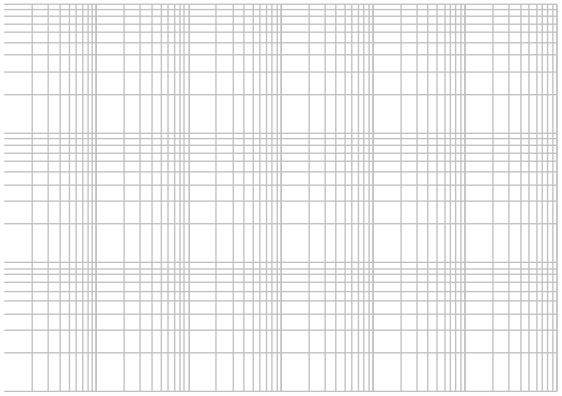

Figure 13. Maximum Transient Thermal Impedance

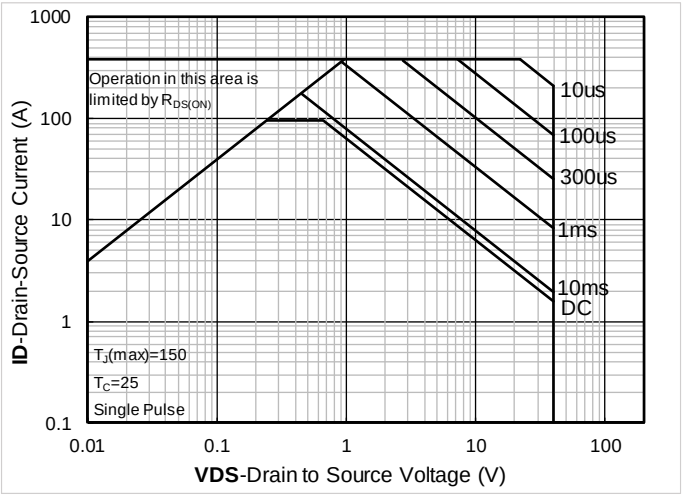

Figure 14. Safe Operation Area

■ Test Circuits & Waveforms

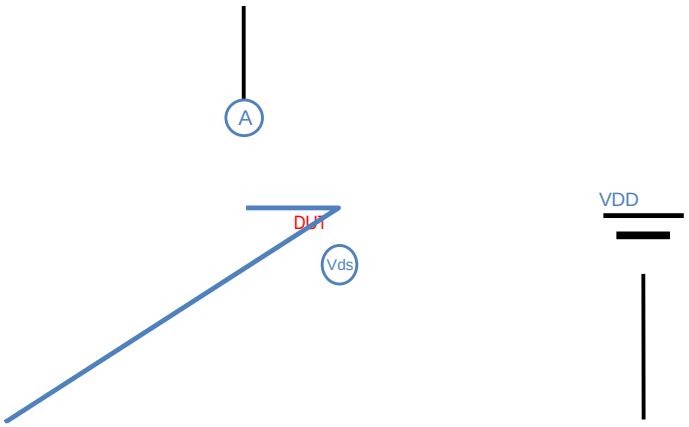

■ PDFN5060-8L-B-1.1MM Package information

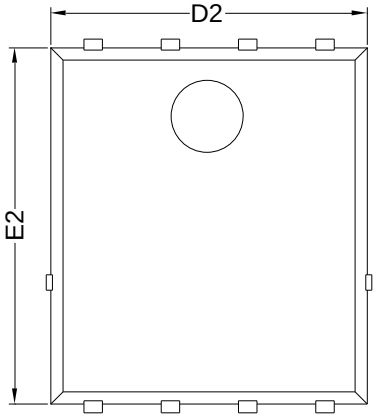

Top View

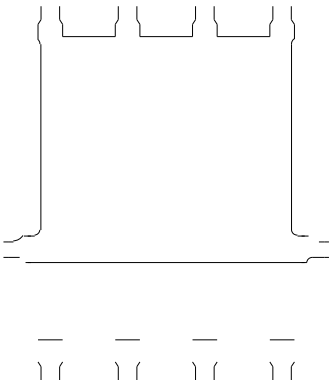

Bottom View

Side View

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
D	5.15	5.35	5.55
E	5.95	6.15	6.35
A	1.00	1.10	1.20
A1		0.254 BSC	
A2			0.10
D1	3.92	4.12	4.32
E1	3.52	3.72	3.92
D2	5.00	5.20	5.40
E2	5.66	5.86	6.06
E3		0.254 REF	
E4		0.21 REF	
L1	0.56	0.66	0.76
L2		0.50 BSC	
b	0.31	0.41	0.51
e		1.27 BSC	

Note:
1.Controlling dimension:in millimeters.
2.General tolerance:±0.10mm.
3.The pad layout is for reference purposes only.