



N-Channel Enhancement Mode Field Effect Transistor

Product Summary

V_{DS}	30V
I_D	5.6A
$R_{DS(ON)}$ (at $V_{GS}=10V$)	24mohm
$R_{DS(ON)}$ (at $V_{GS}=4.5V$)	38mohm

General Description

Trench Power LV MOSFET technology
High density cell design for low $R_{DS(ON)}$
High Speed switching
Moisture Sensitivity Level 1
Epoxy Meets UL 94 V-0 Flammability Rating
Halogen Free

Applications

Battery protection
Load switch
Power management

Absolute Maximum Ratings ($T_A=25$ unless otherwise noted)

Parameter		Symbol	Limit	Unit
Drain-source Voltage		V_{DS}	30	V
Gate-source Voltage		V_{GS}	± 20	V
Drain Current	$T_A=25$	I_D	5.6	A
	$T_A=70$		4.5	
Pulsed Drain Current ^A		I_{DM}	30	A
Total Power Dissipation	$T_A=25$	P_D	1.2	W
	$T_A=70$		0.8	W



YJL3404A

RECOMMEND
YJL3404B
FOR NEW DESIGN

Electrical Characteristics ($T_J=25$ unless otherwise noted)

Parameter	Symbol	Conditions	Min	Typ	Max	Units	
Static Parameter							
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{GS}=0V, I_D=250\mu A$	30			V	
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=30V, V_{GS}=0V$			1	μA	
Gate-Body Leakage Current	I_{GSS1}	$V_{GS}=\pm 20V, V_{DS}=0V$			± 100	nA	
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=250\mu A$	1	1.5	2.2	V	
Static Drain-Source On-Resistance	$R_{DS(on)}$	$V_{GS}=10V, I_D=5.6A$		17	24	m	
		$V_{GS}=4.5V, I_D=5A$		26	38		
Diode Forward Voltage	V_{SD}	$I_S=5.6A, V_{GS}=0V$			1.2	V	
Dynamic Parameters							
Input Capacitance	C_{iss}	$V_{DS}=15V, V_{GS}=0V, f=1MHz$		526		pF	
Output Capacitance	C_{oss}				78		
Reverse Transfer Capacitance	C_{rss}				69		
Switching Parameters							

Total Gate Charge

Q_g

$V_{GS}=10$



Typical Performance Characteristics

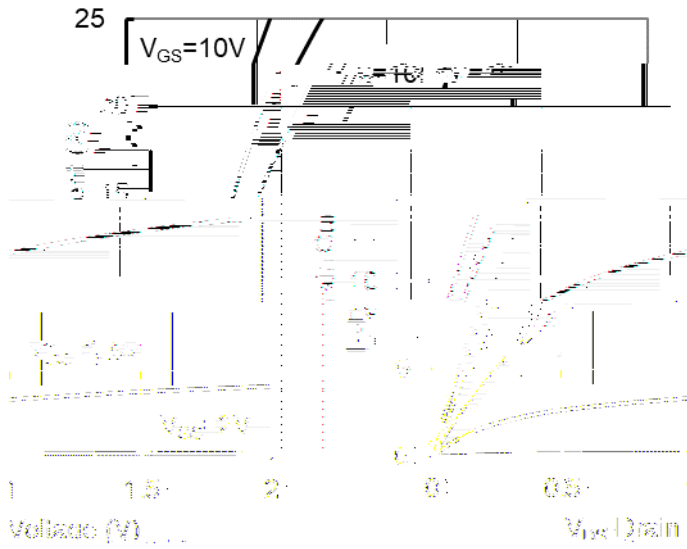


Figure1. Output Characteristics

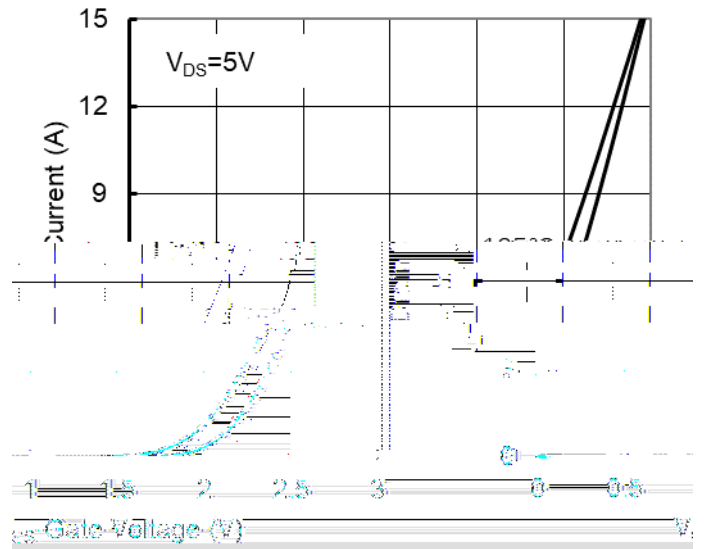


Figure2. Transfer Characteristics



Figure 3: On-Resistance vs. Drain Current and Gate Voltage

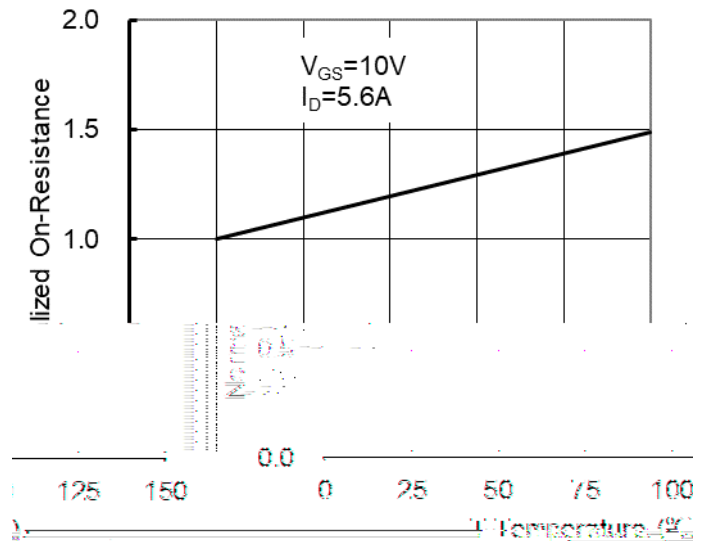
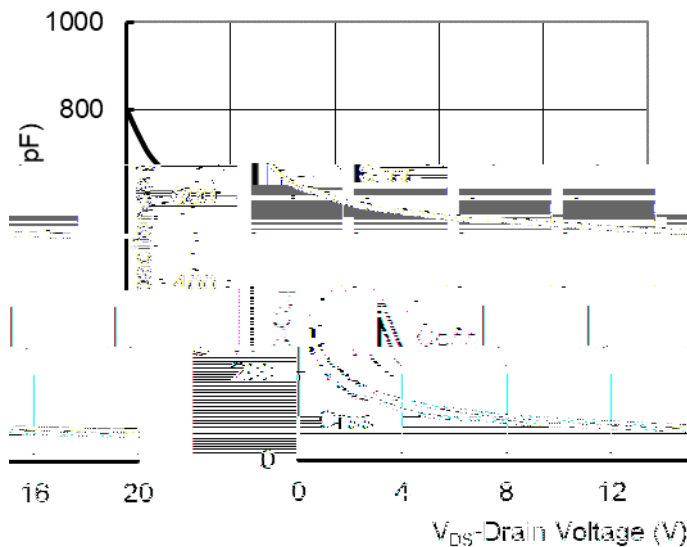


Figure 4: On-Resistance vs. Junction Temperature



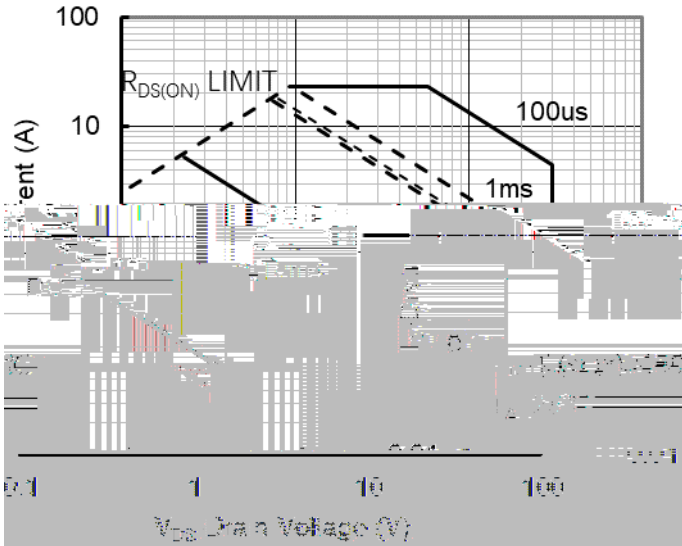


Figure7. Safe Operation Area

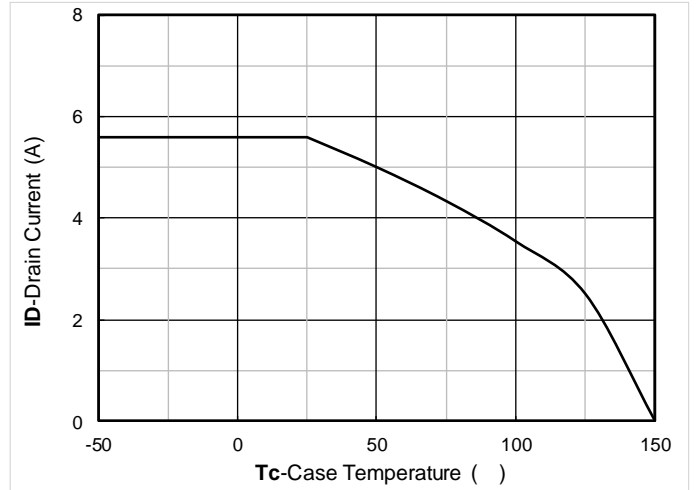


Figure8. Maximum Continuous Drain Current vs Ambient Temperature

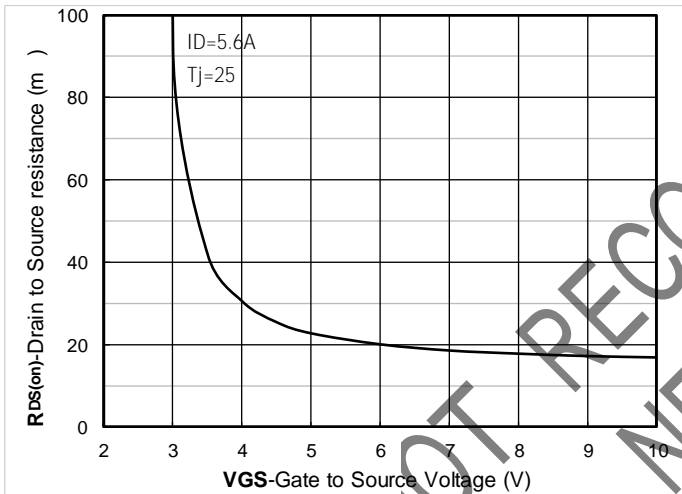


Figure 9. On-Resistance vs Gate to Source Voltage

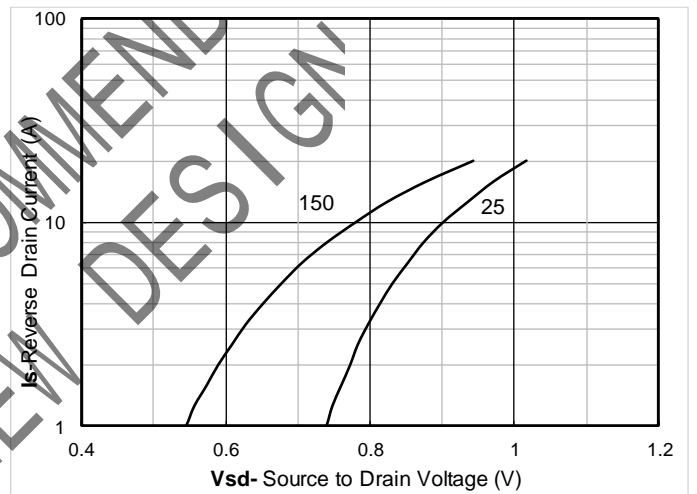


Figure 10. Forward characteristics of reverse diode

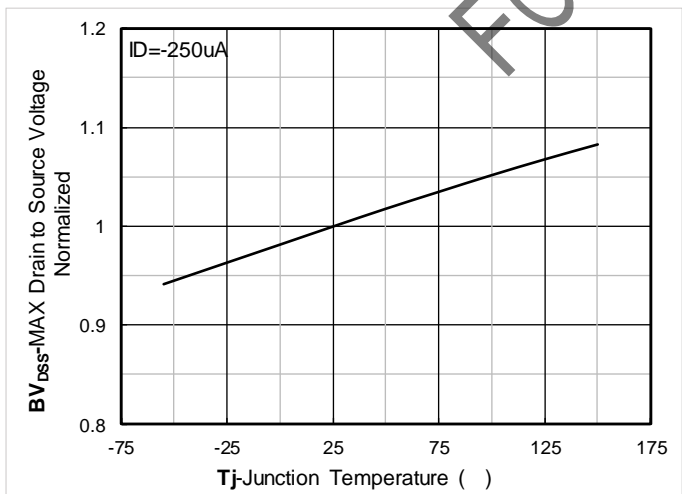


Figure 11. Normalized breakdown voltage

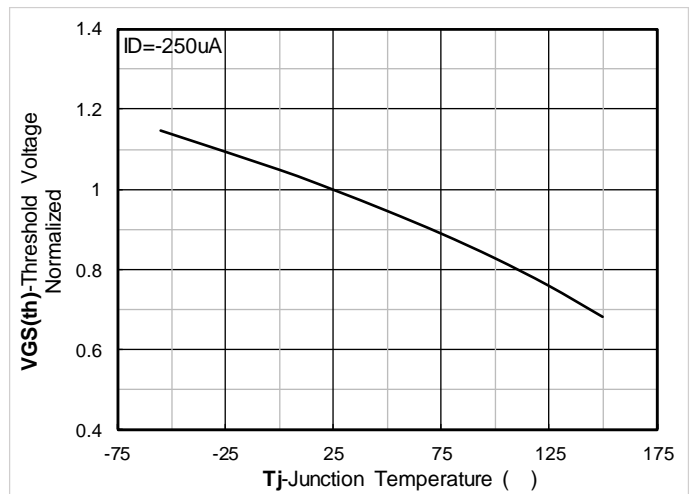


Figure 12. Normalized Threshold voltage

YJL3404A

RECOMMEND
YJL3404B
FOR NEW DESIGN

YJL3404A

RECOMMEND
YJL3404B
FOR NEW DESIGN



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.