




Electrical Characteristics (Ta=25 unless otherwise noted)




PZT2907A

Characteristics (Typical)



Static Characteristic

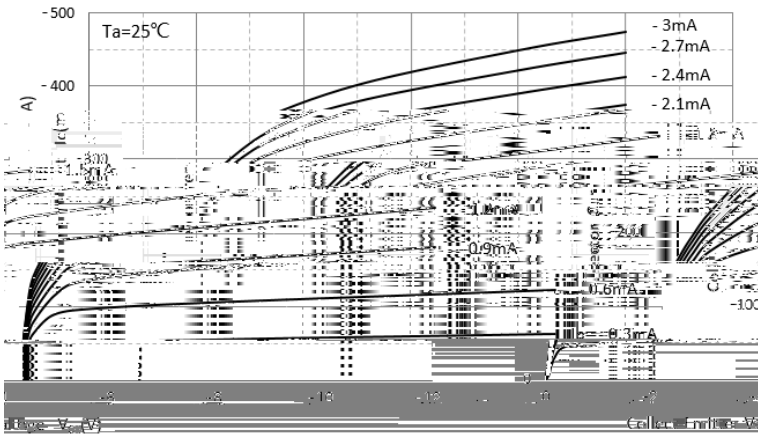


DC Current Gain

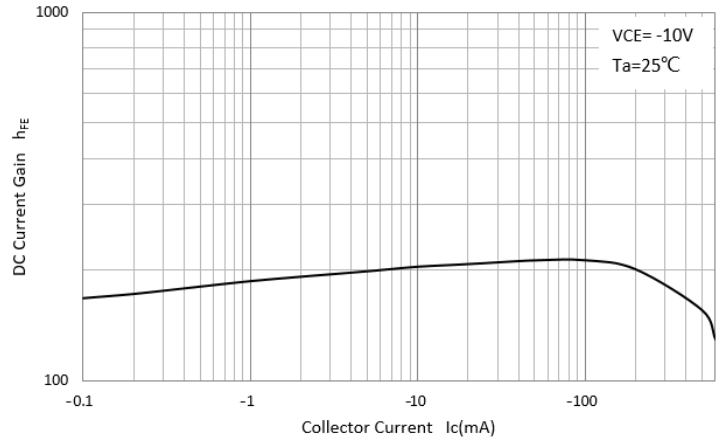


Collector-Emitter Saturation Voltage

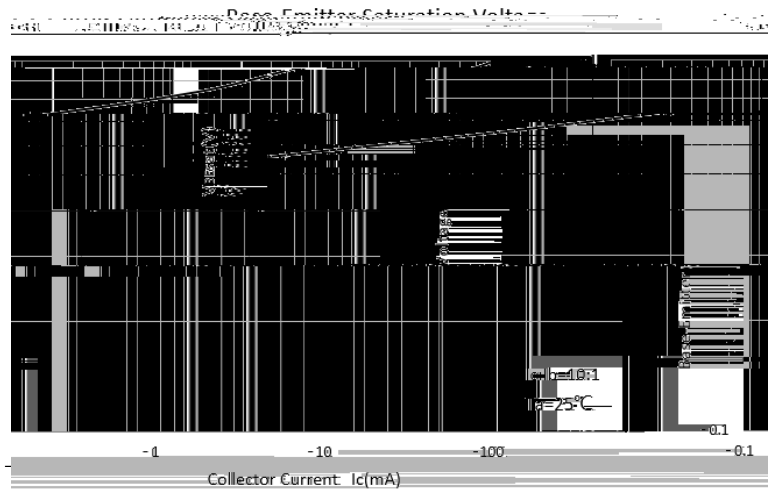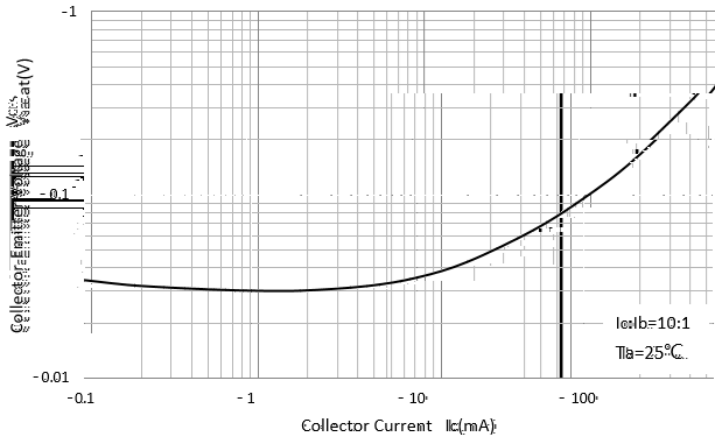


Base-Emitter On Voltage


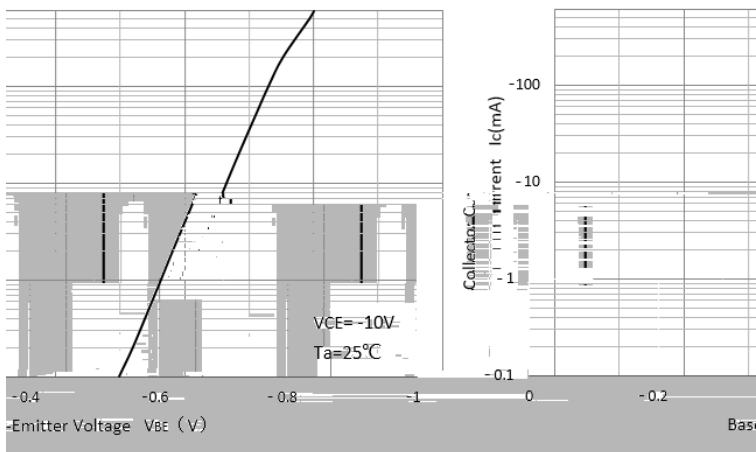


Cob/Cib-Vcb/Veb

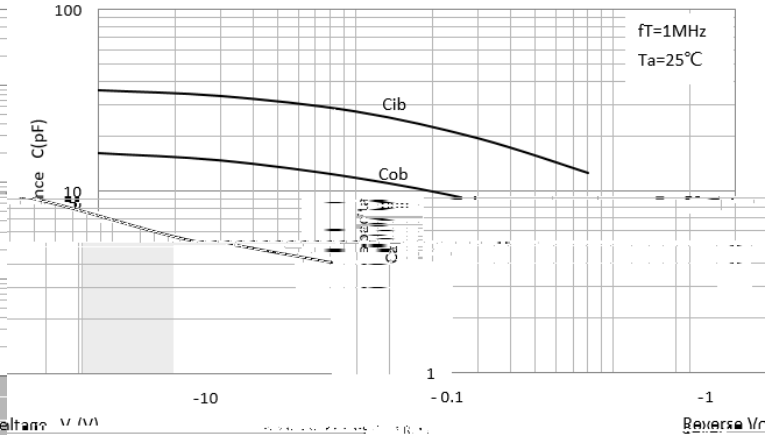

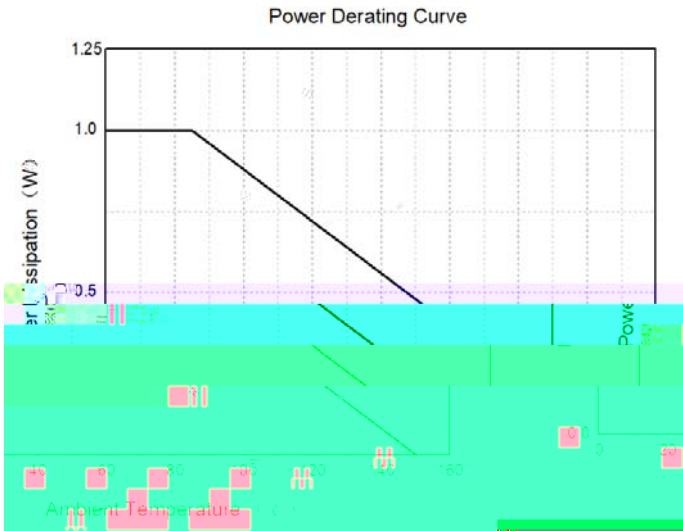


vSOT-223 Package Outline Dimensions

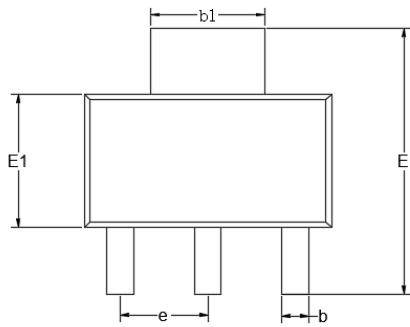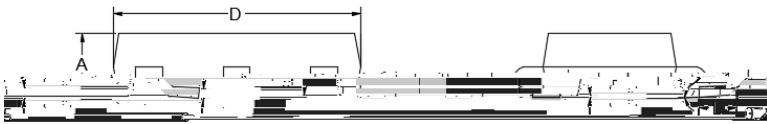

DIM	DIMENSIONS			
	INCHES		MM	
	MIN	MAX	MIN	MAX
A	0.0591	0.0670	1.5000	1.7000
b	0.0000	0.0010	0.0000	0.0254
b1	0.0000	0.0010	0.0000	0.0254
E	0.0000	0.0010	0.0000	0.0254
E1	0.0000	0.0010	0.0000	0.0254
e	0.0000	0.0010	0.0000	0.0254
L	0.0000	0.0010	0.0000	0.0254

SOT-223 Suggested Pad Layout

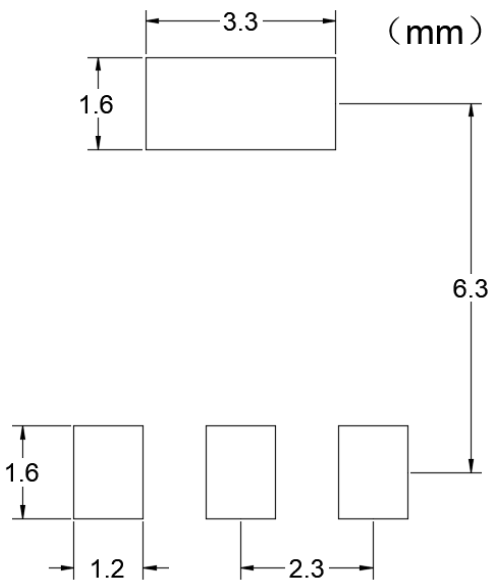



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.