



## Bridge Rectifiers



### Features

- UL recognition, file #E230084
- Thin single in-line package
- Glass passivated chip junction
- High surge current capability
- Solder dip 275 °C max

### Typical Applications

General purpose use in AC/DC bridge full wave rectification for switching power supply, home appliances, office equipment, industrial automation applications.

### Mechanical Data

- Package:** 6KBJ
- Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant
- Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- Polarity:** As marked on body

### Maximum Ratings ( $T_a=25$ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	GBJ3516A
Device marking code			GBJ3516A
Maximum Repetitive Peak Reverse Voltage	VRRM	V	1600
Maximum RMS Voltage	VRMS	V	1120
Maximum DC blocking Voltage	VDC	V	1600

Average rectified output current  
@60Hz sine wave, R-load

Dielectric strength @ Terminals to case, AC 1 minute	Vdis	KV	2.5
Mounting torque @ Recommend torque 5kg cm	Tor	kg cm	8




Electr

Lt eM M

2

Outline Dimensions

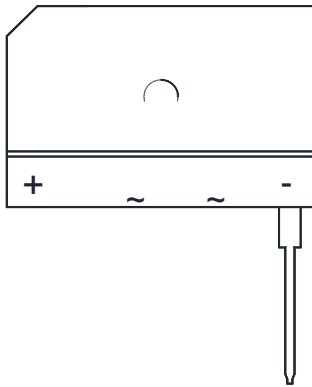

Dimensions in millimeters

6KBJ		
Dim	Min	Max
A	29.7	30.3
B	19.7	20.3
C	17.0	18.0
D	4.8	5.8
E	3.8	4.2
F	7.3	7.7
G	9.8	10.2
H	0.9	1.1
I	2.0	2.4
J	2.3	2.7
K	3.4	3.8
L	4.4	4.8
M	10.8	11.2
N	3.1	3.7
O	3.1	3.4
P	0.6	0.8



## Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.