



# ESD1502EB

---

## 2-Line, Bi-directional, Transient Voltage Suppressor

### Features

- Transient protection for each line according to  
IEC61000-4-2(ESD):  $\pm 30\text{kV}$  contact,  $\pm 30\text{kV}$  air  
IEC61000-4-5:9A ( $t_p=8/20\mu\text{s}$ )
- Low leakage current
- Ultra low clamping voltage
- RoHS Compliant

### Applications


- Cellular Handsets and Accessories
- Notebooks and Handhelds
- Portable Instrumentation
- Set ToA- - - - - . m a ap






Characteristics (Typical)

Fig.1 8/20us Waveform Per IEC6100-4-5

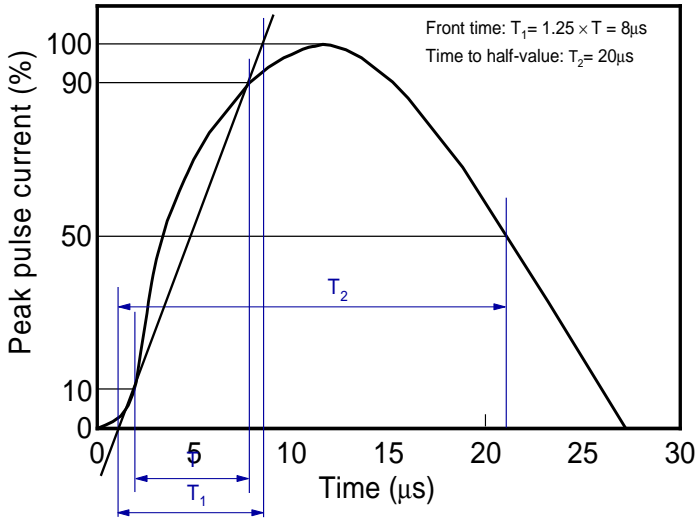




# ESD1502EB

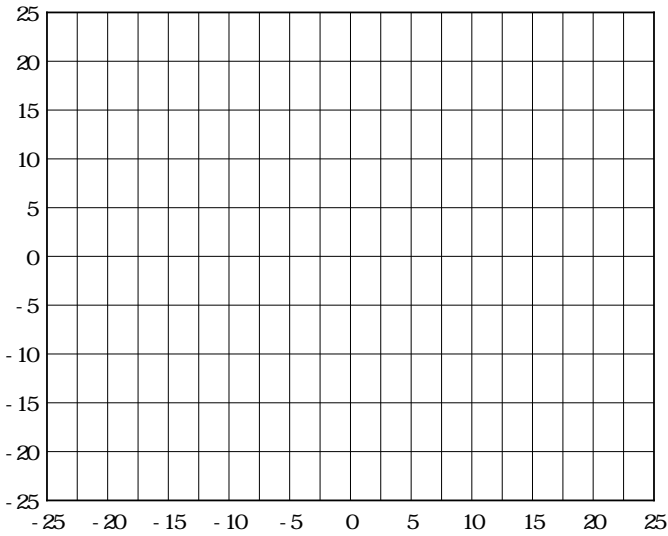

## Outline Dimensions

