


1-Line, Bi-directional, Transient Voltage Suppressor

Features

Applications

Mechanical Data

Definitions of electrical characteristics

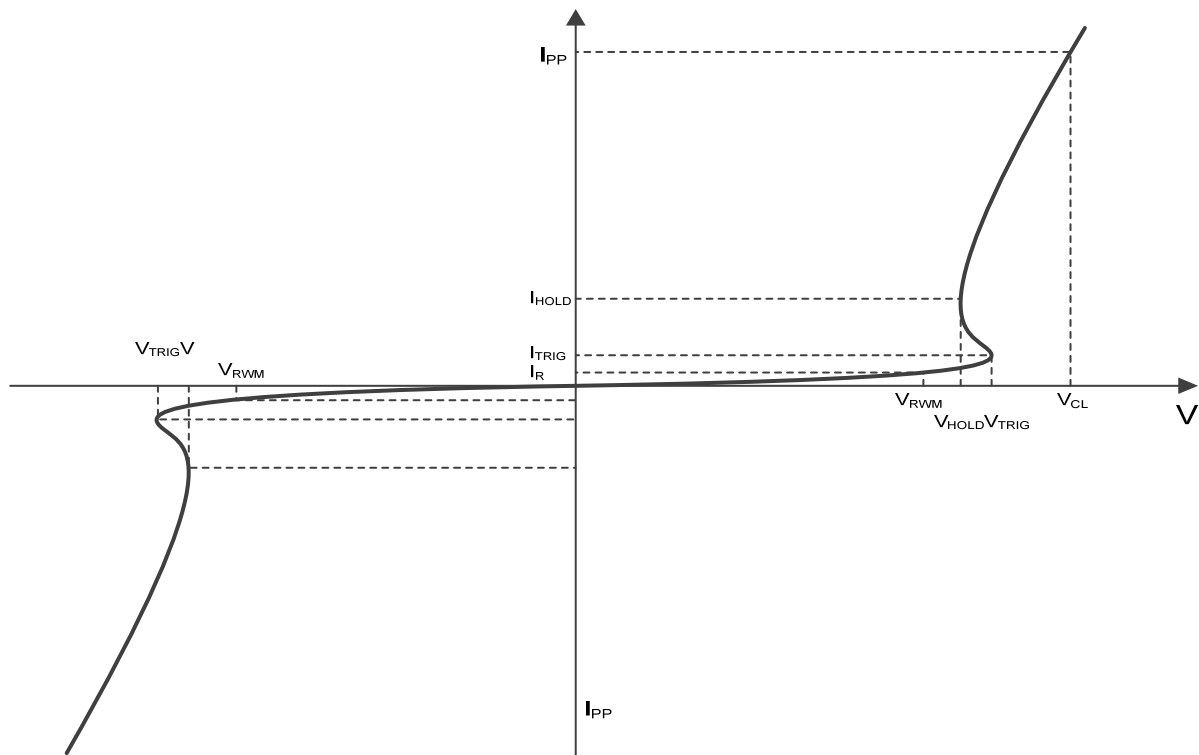



ESD3V3D3B

Maximum Ratings

PARAMETER	SYMBOL	Rating	UNIT

Electrical Characteristics $T_a=25$ Unless otherwise specified

PARAMETER	Symbol	UNIT	Conditions	Min	Typ	Max
¹⁾						
¹⁾						
²⁾						
³⁾						

Ordering Information (Example)


PREFERED P/N	PACKING CODE	UNIT WEIGHT(mg)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE

ESD3V3D3B




ESD3V3D3B


ESD clamping
(+8kV contact discharge per IEC61000-4-2)

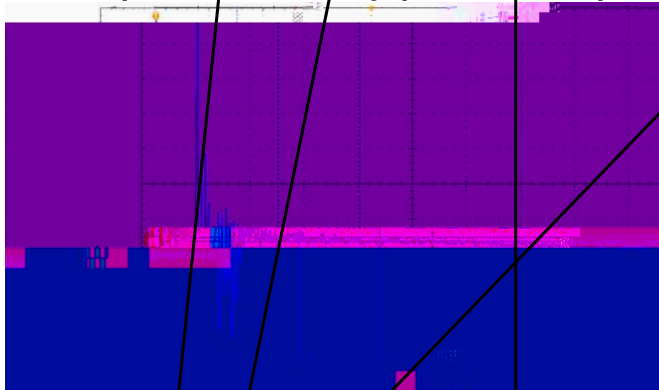

ESD clamping
(-8kV contact discharge per IEC61000-4-2)

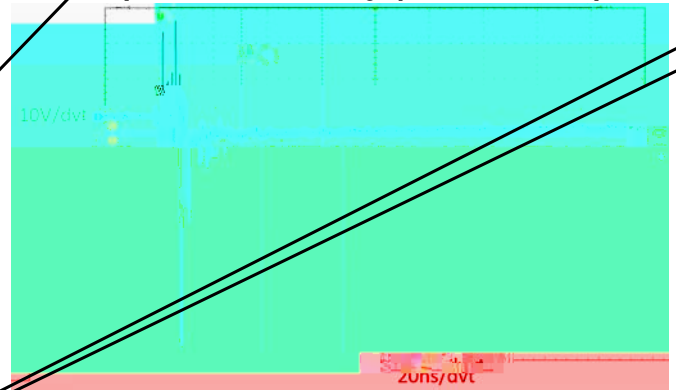

TLP Measurement

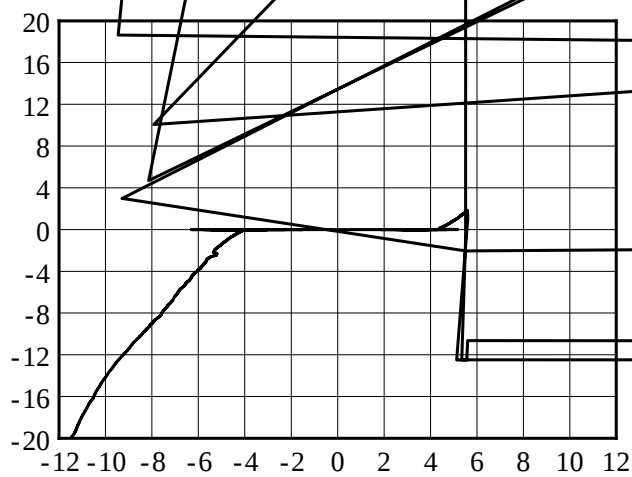

Outline Dimensions

ESD3V3D3B
