


- V_{RWM} Reverse stand-off voltage
- I_R Reverse leakage current
- V_{BR} Reverse breakdown voltage
- V_{CL} Clamping voltage
- I_{PP} Peak pulse current






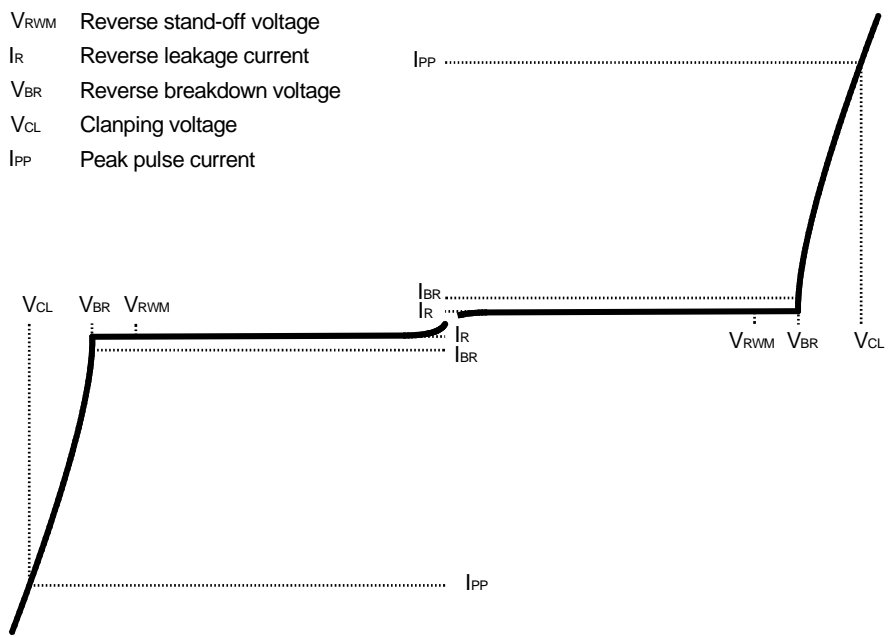

7 \UfUWhYf]gh]Wg' (Typical)

:] ['% , # & \$ g' kUjYZcfa 'dYf' = 97 * % \$\$\$!(1)

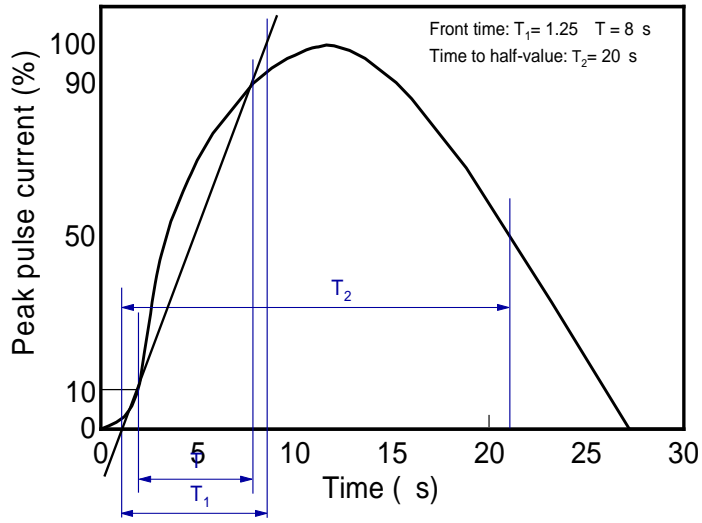

9G8G@7)J)@65%



9G8G@7)J)@65%

8]gW'U]a Yf'

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves m