RoHS
COMPLIANT

i Ñé½0%

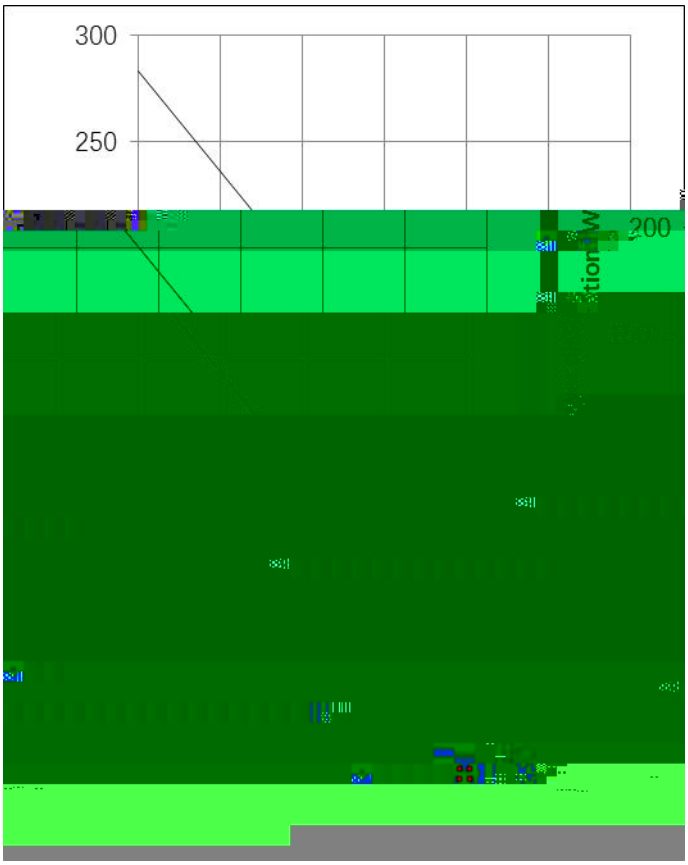

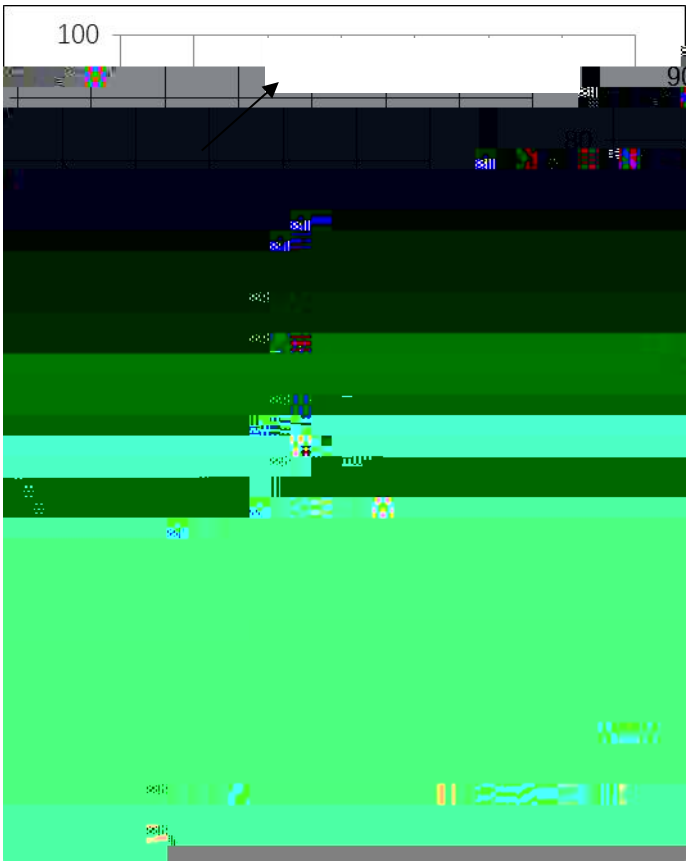

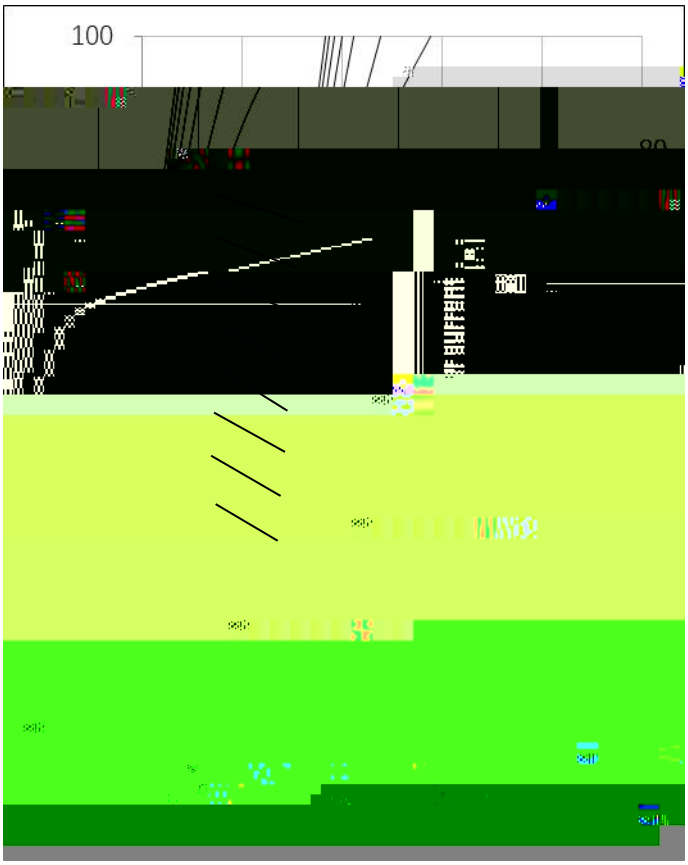

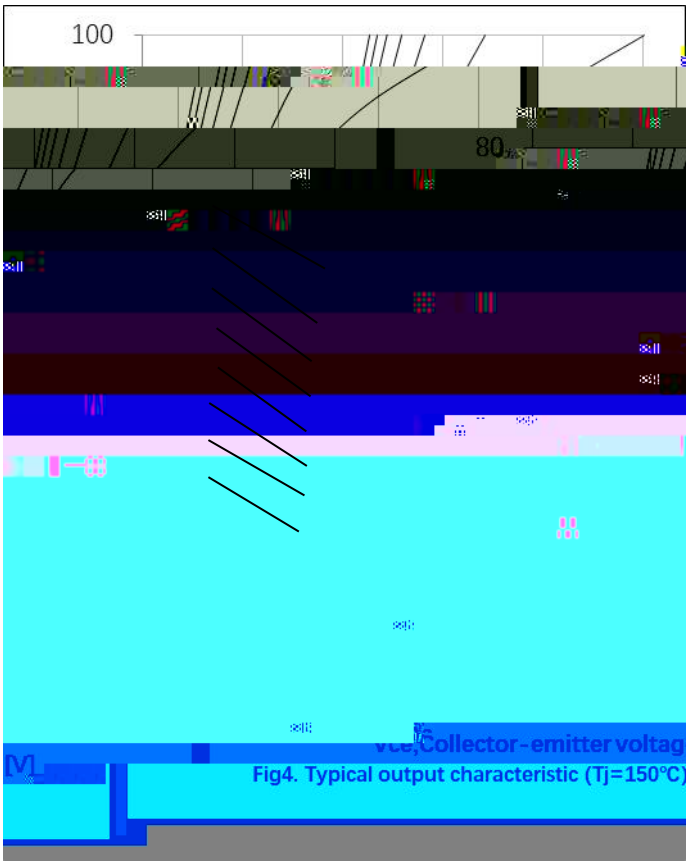

Fig4. Typical output characteristic (Tj=150°C)

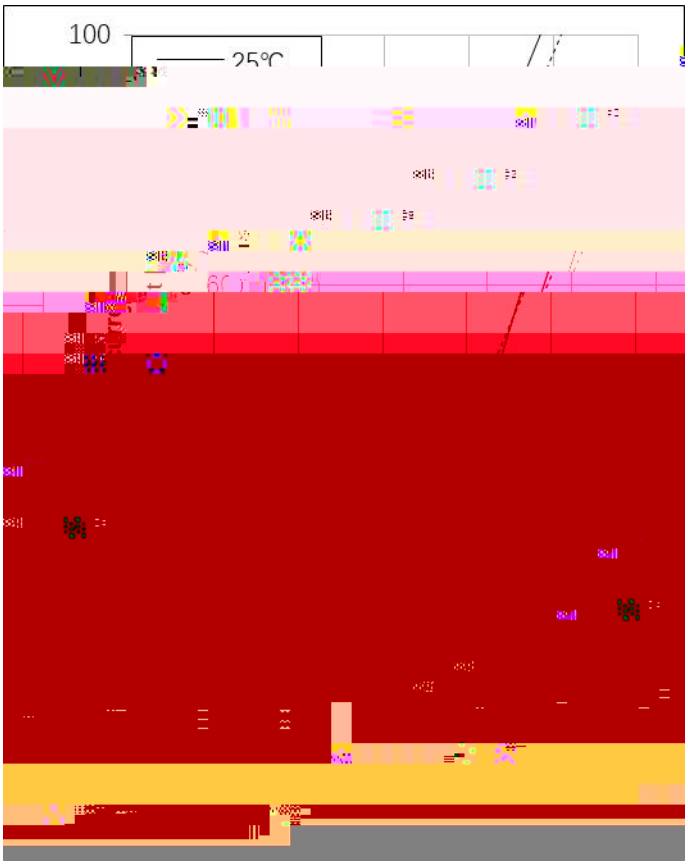

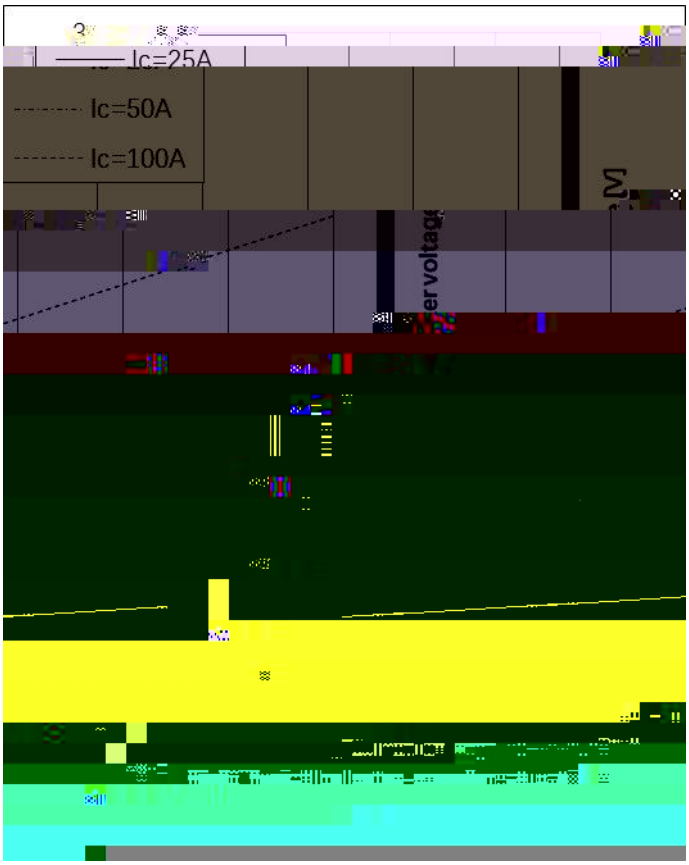

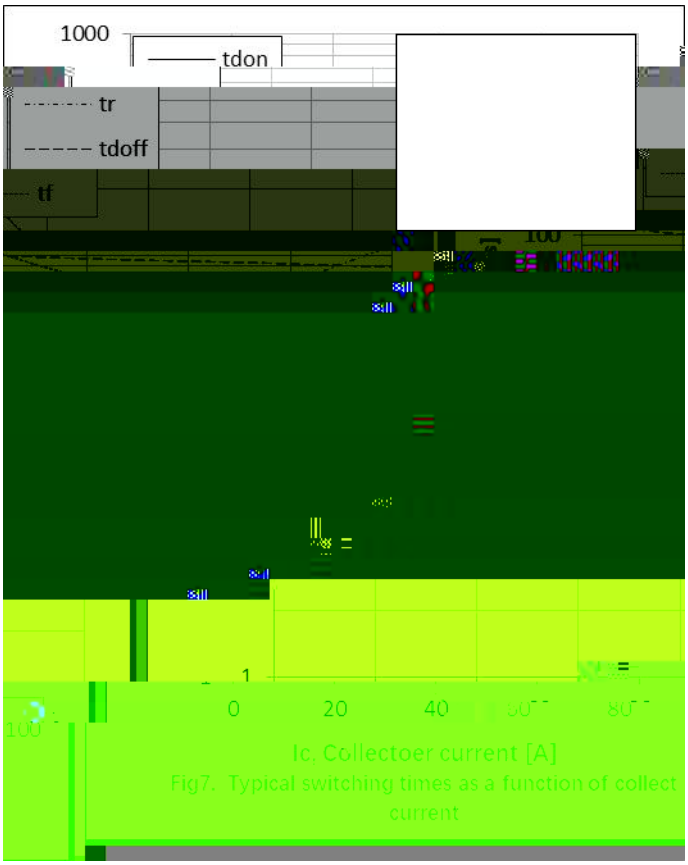

Fig7. Typical switching times as a function of collect current

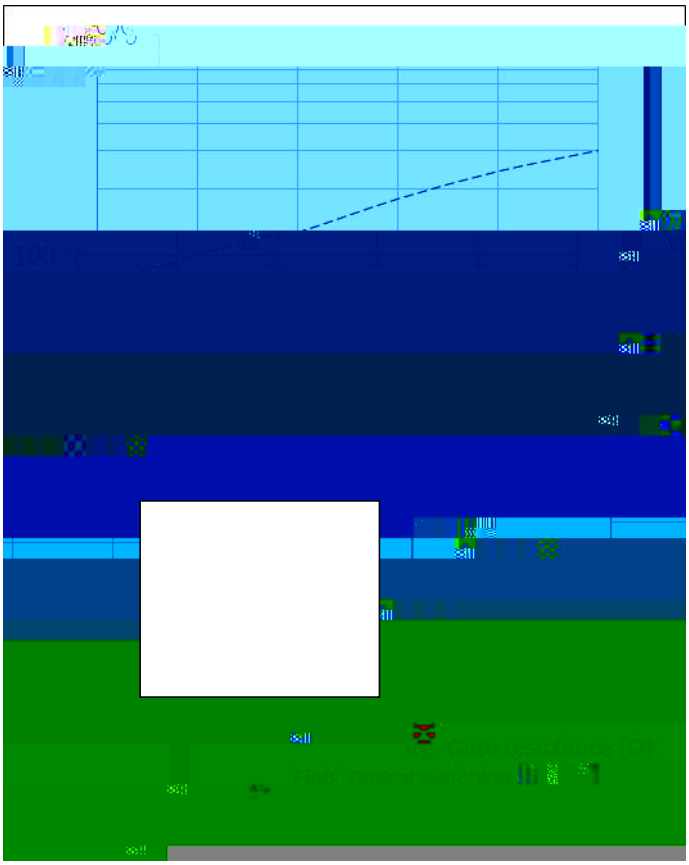

S

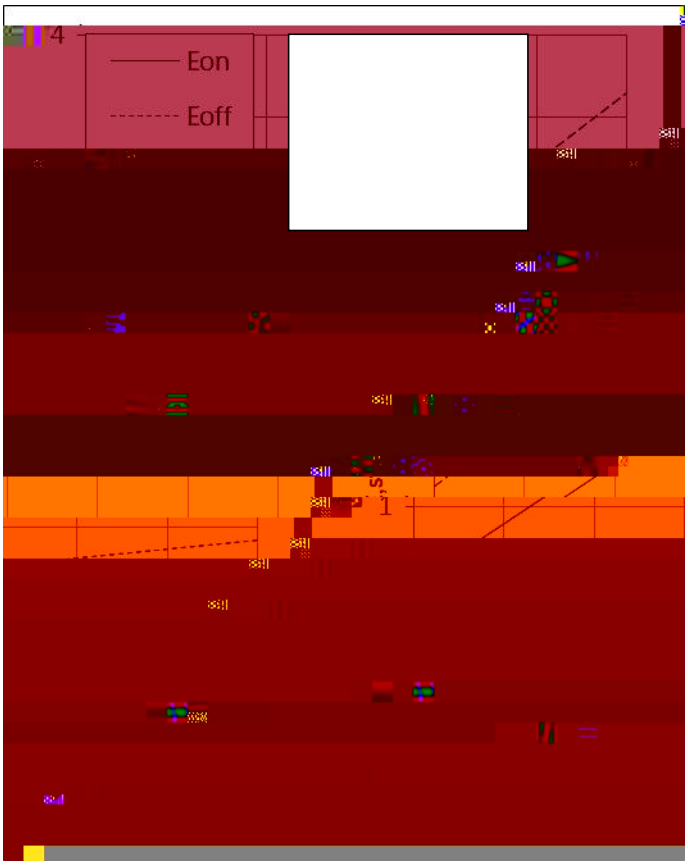
Eon
Eoff

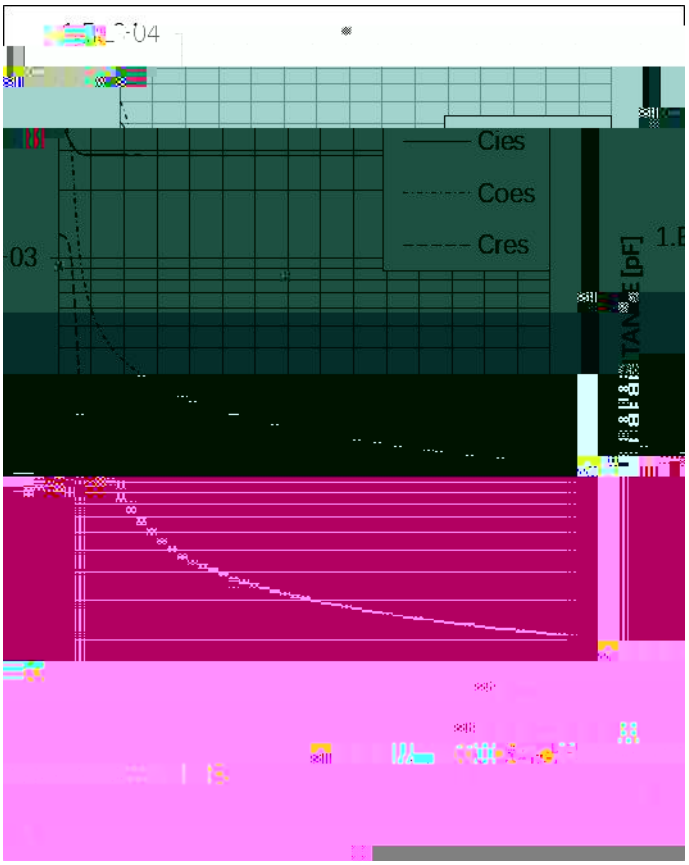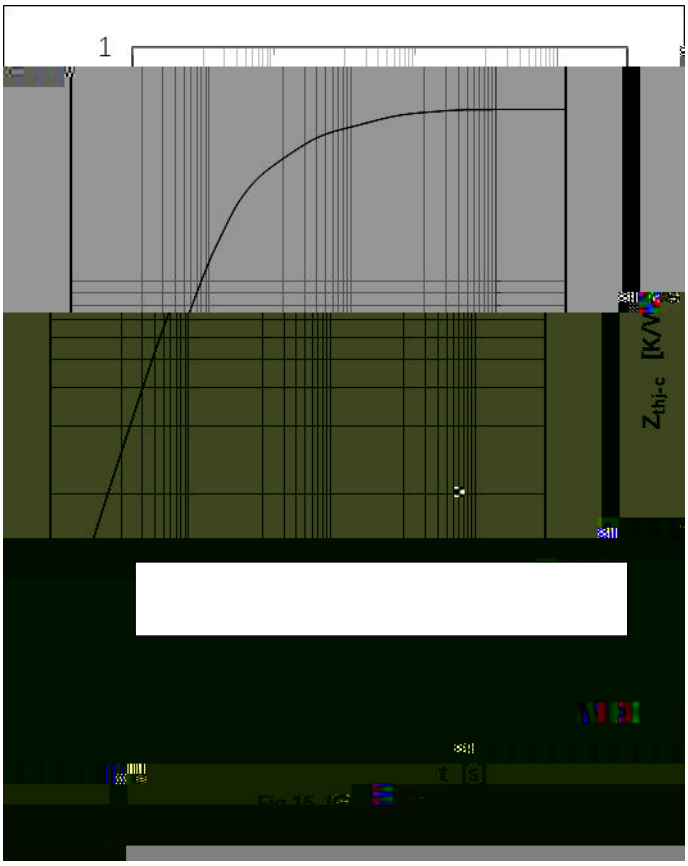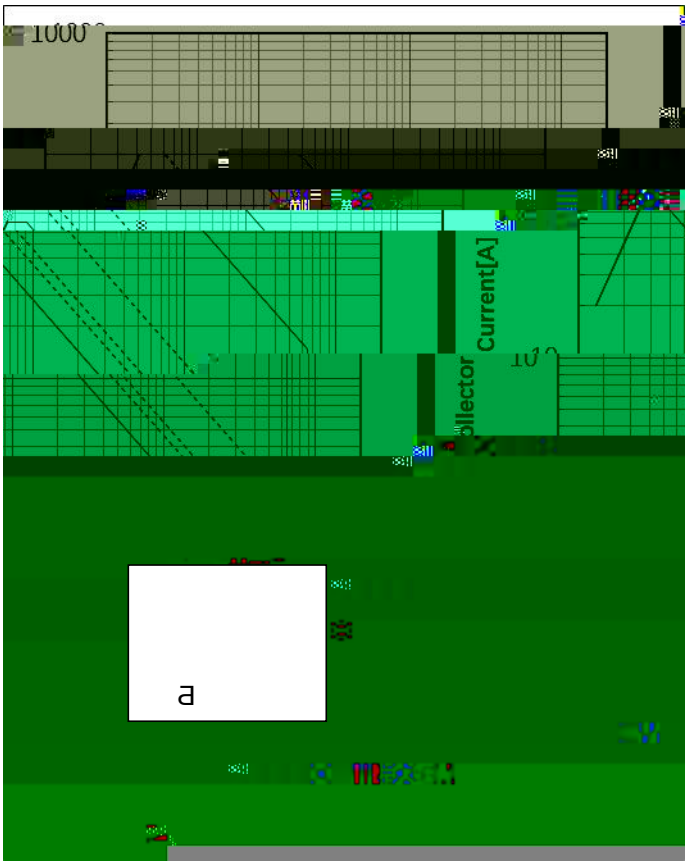
Cies
Coes
Cres