



DGZ75N65CTS2A



DGZ75N65CTS2A












Electrical Characteristics of the DIODE


Parameter



DGZ75N65CTS2A

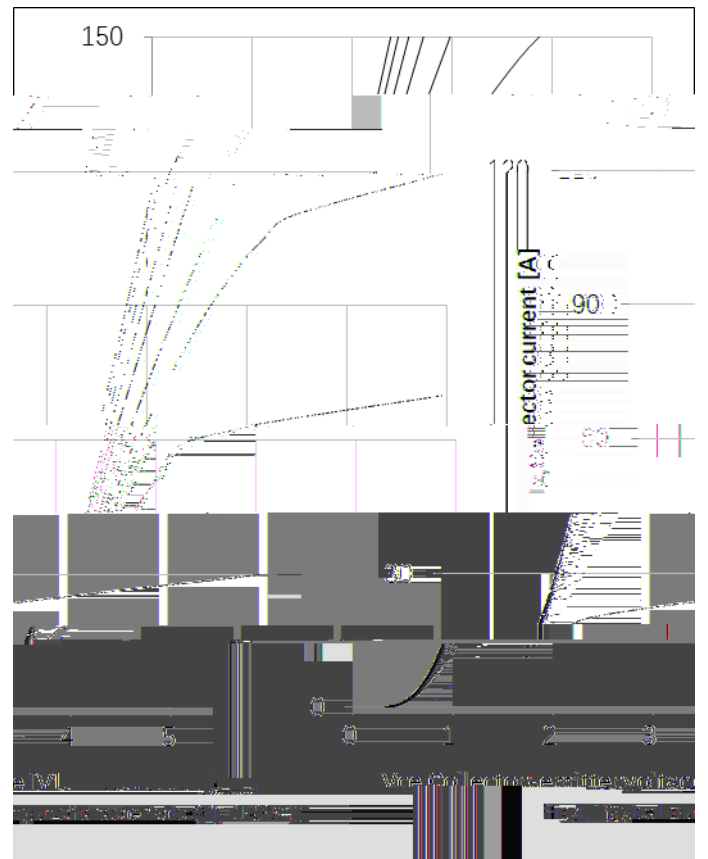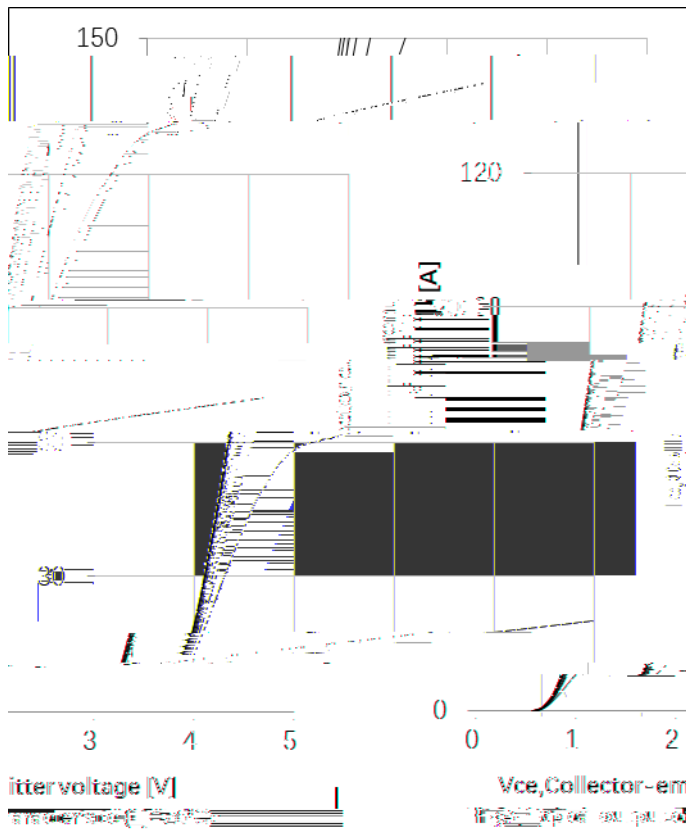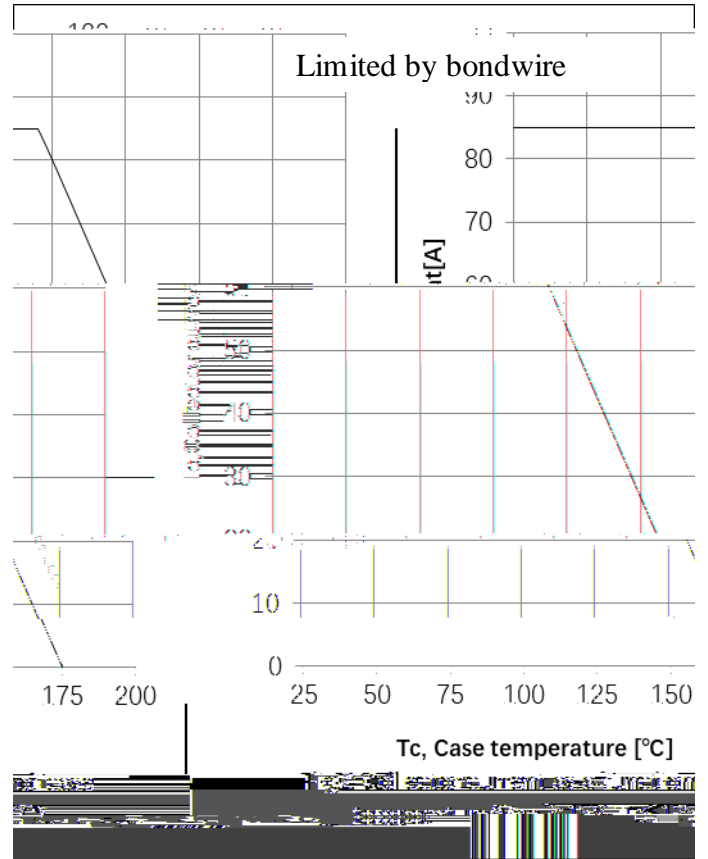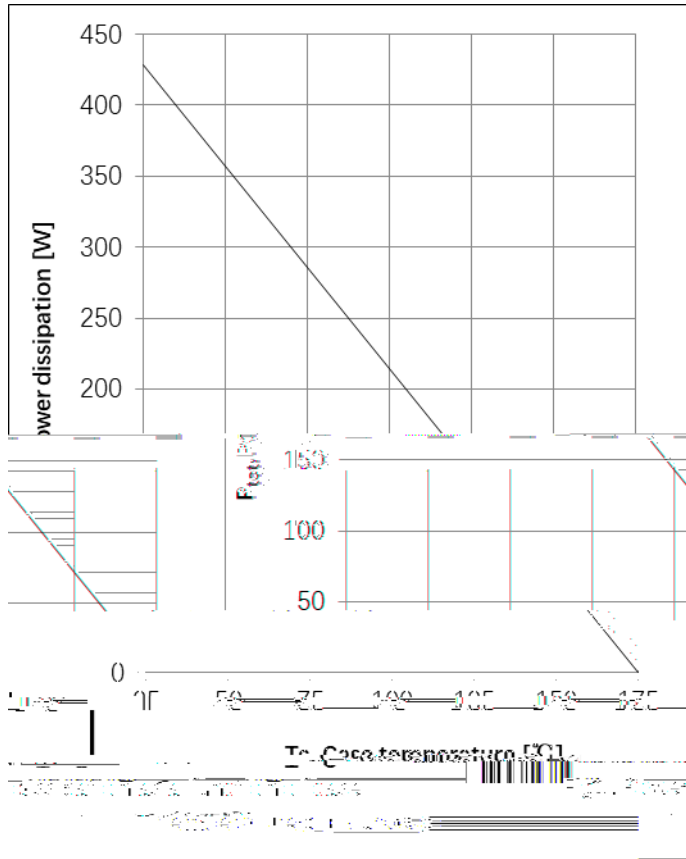

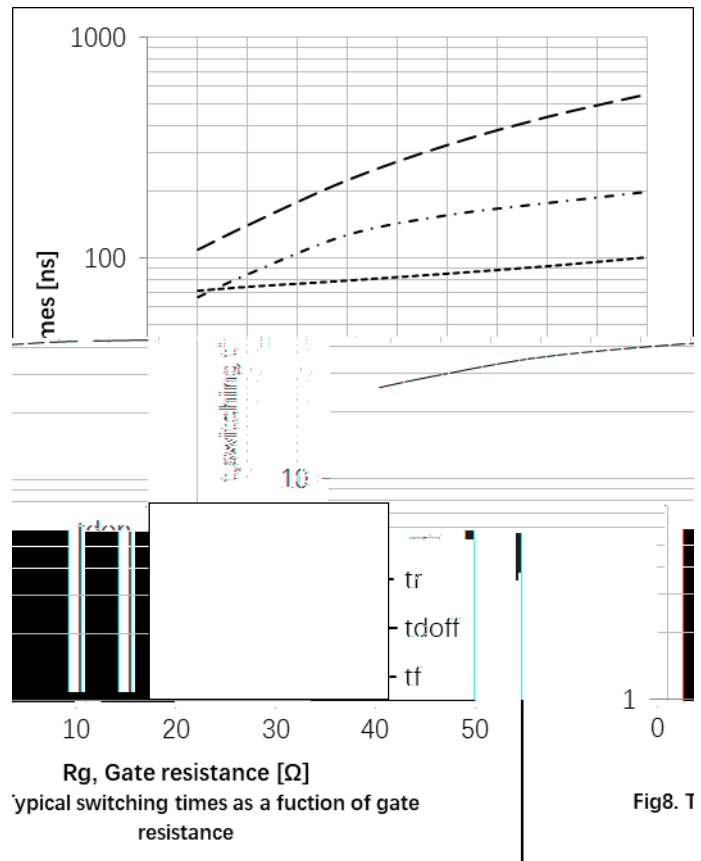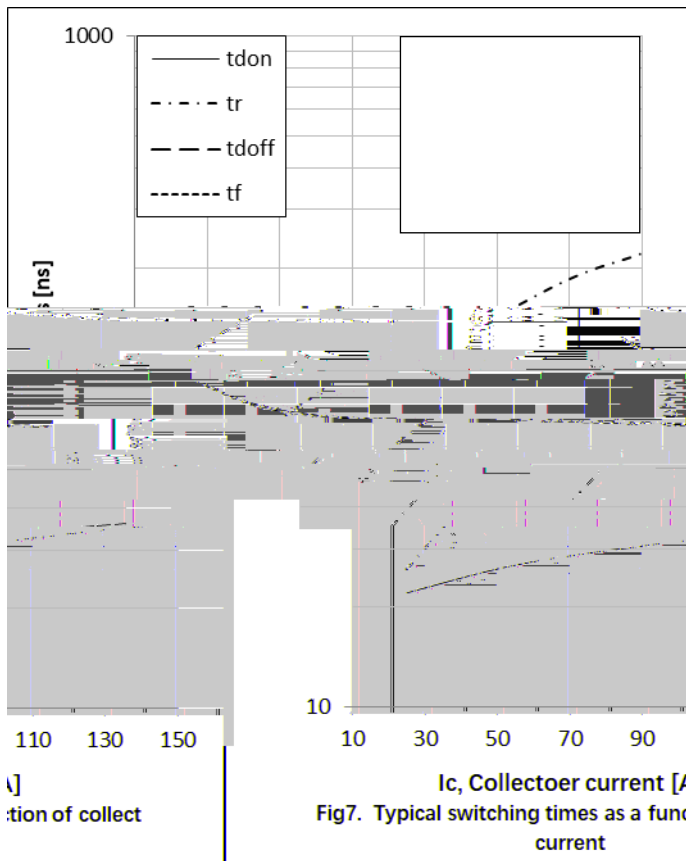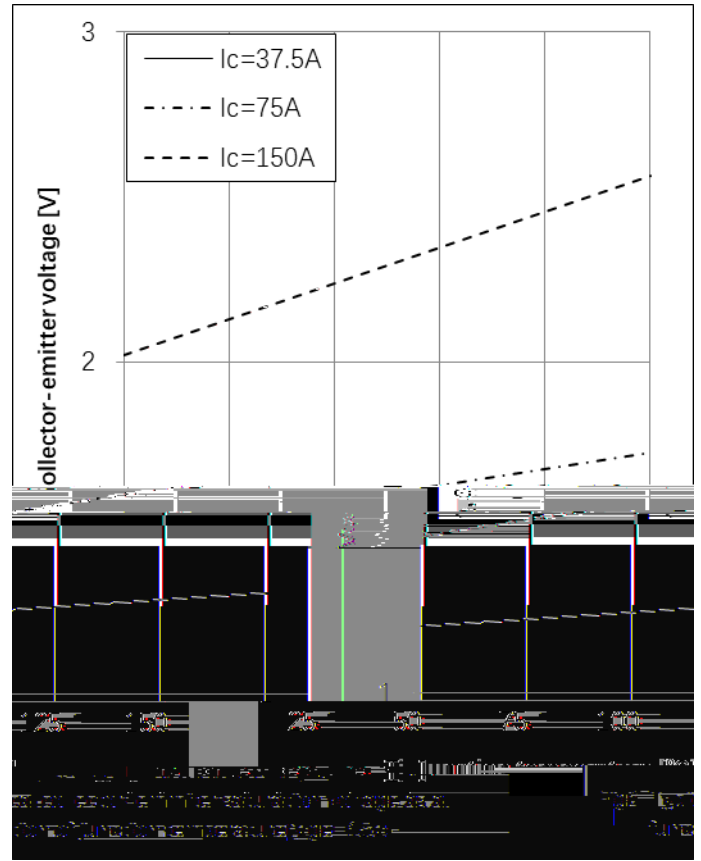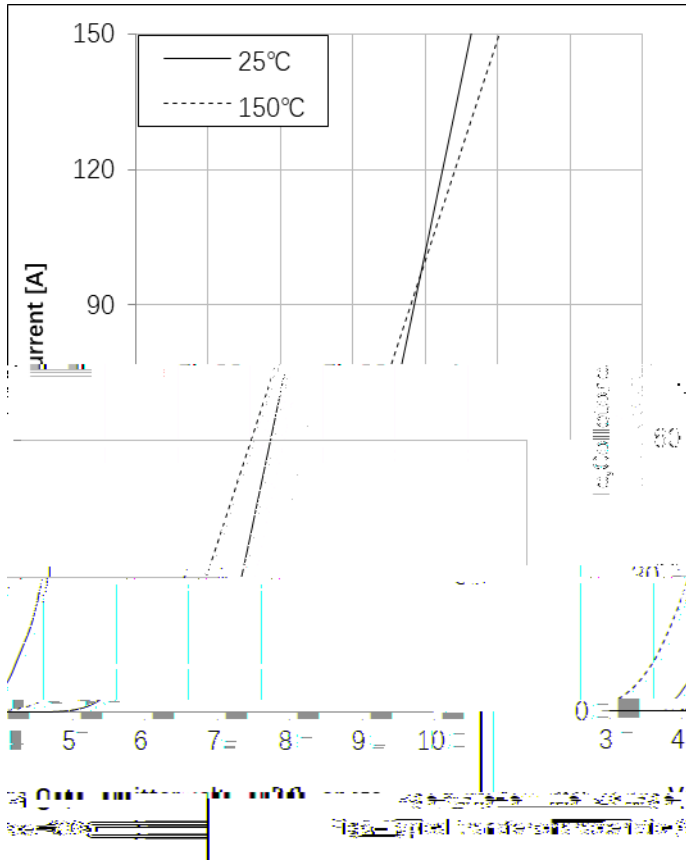



DGZ75N65CTS2A

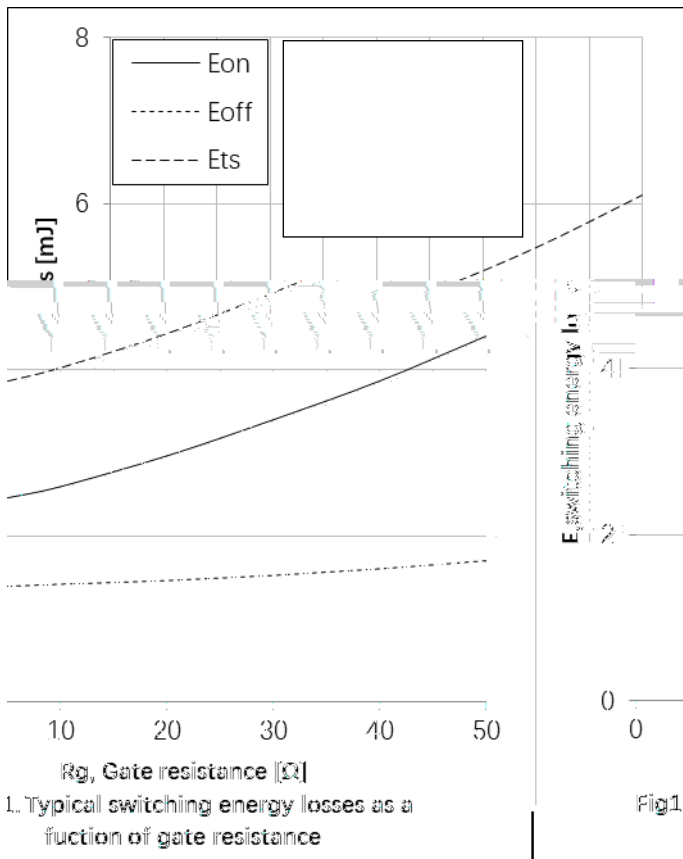
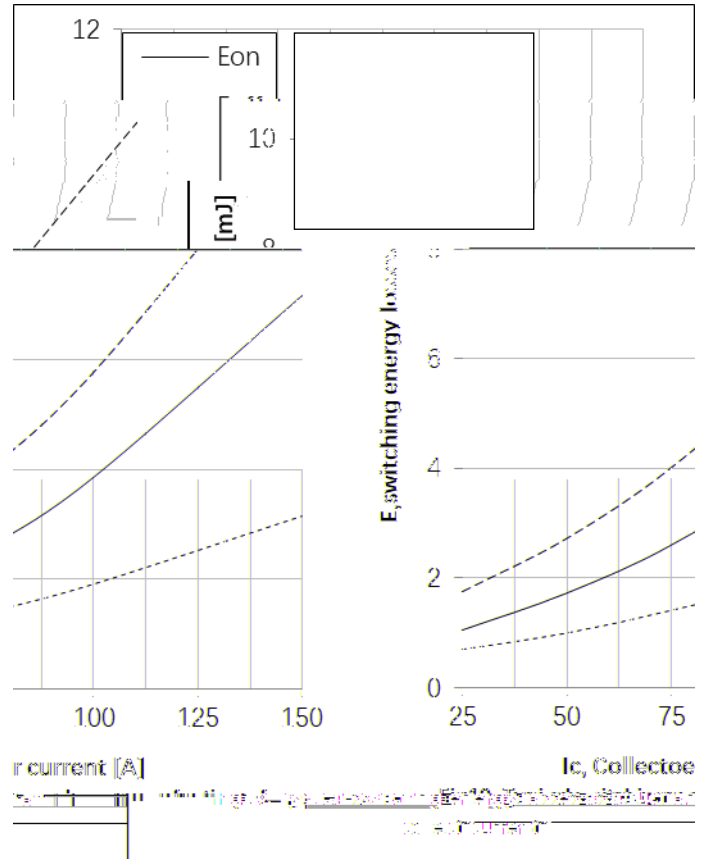
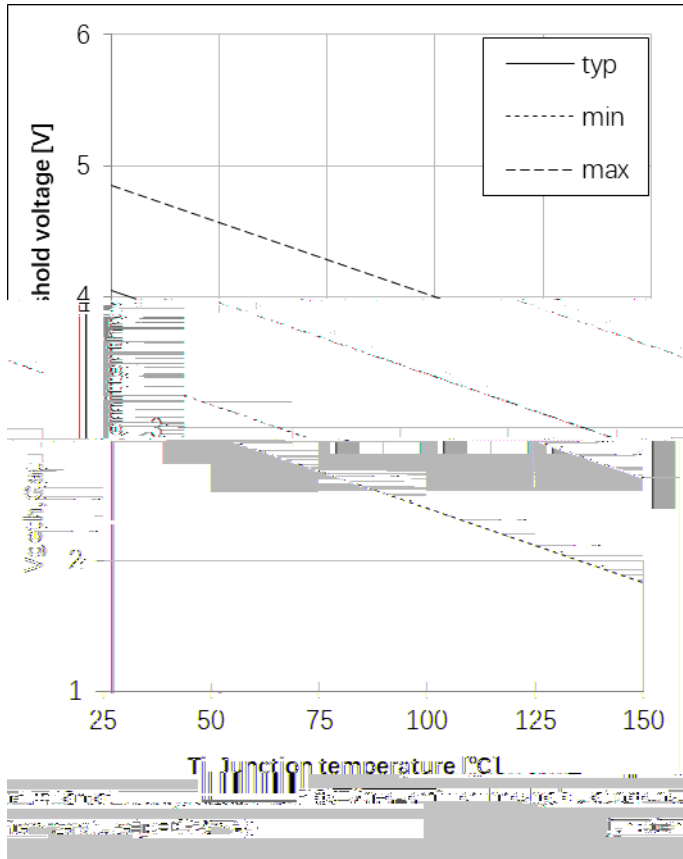


Fig11. Typical switching energy losses as a function of gate resistance



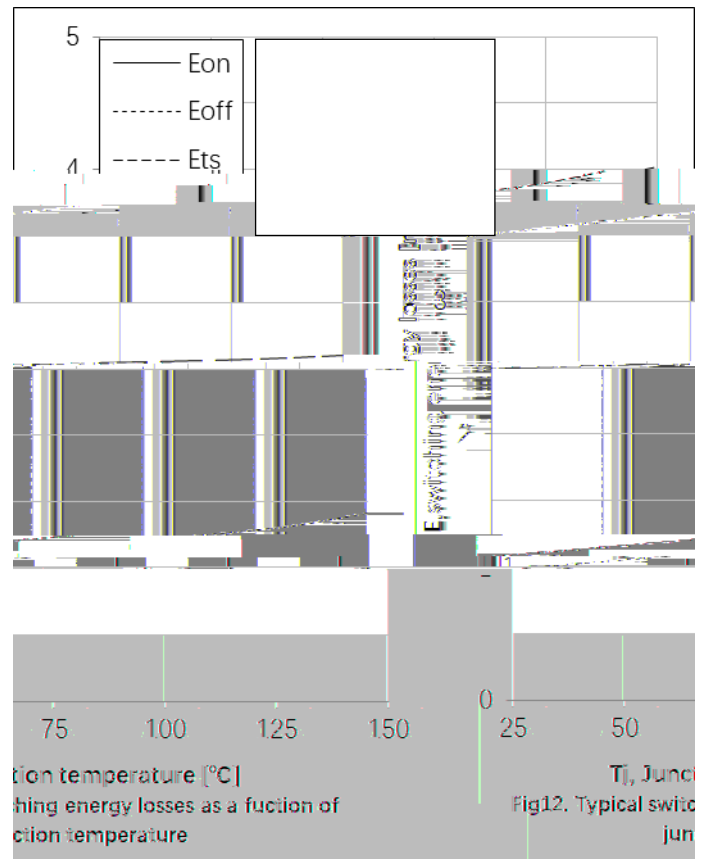


Fig12. Typical switching energy losses as a function of junction temperature




DGZ75N65CTS2A



Package Outline Information

CASE: TO 247-4L

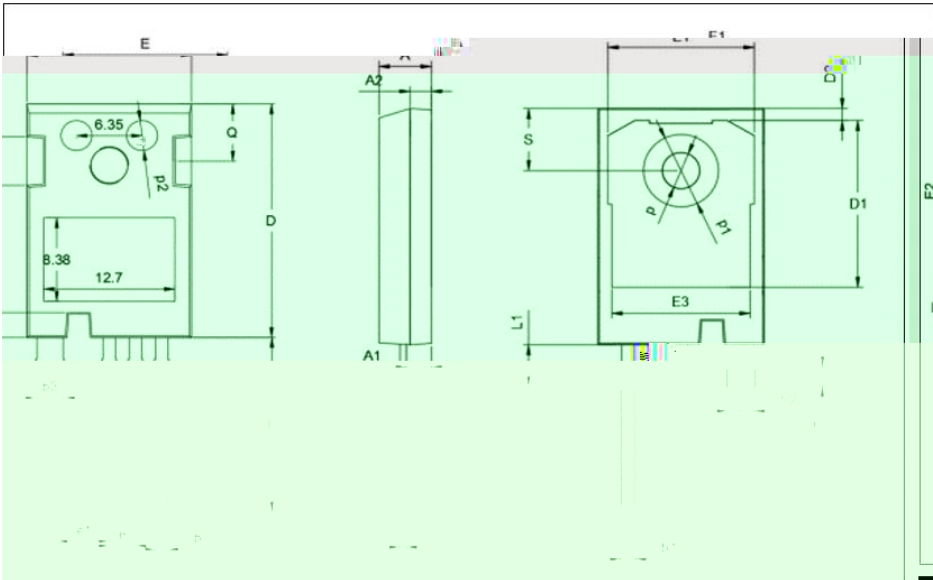

TO247-4L			
Dim	Min	Norm	Max
A	4.80	5.00	5.20
A1	2.30	2.40	2.50
A2	1.88	1.98	2.08
b	1.10	1.20	1.30