



Maximum Ratings

Symbol	Conditions	Values	Units
V_R		100	V
$I_{F(AV)}$	$T_C=125^{\circ}\text{C}$, Per Diode	100	A
	$T_C=125^{\circ}\text{C}$, Per Module	200	A
I_{FSM}	1/2 Cycle , 60Hz, Sine	1500	A
I^2t	$T_J=45^{\circ}\text{C}$, $t=8.3\text{ms}$, 60Hz, Sine	11250	A^2s
T_J		-40 to +150	$^{\circ}\text{C}$
T_{STG}		-40 to +150	$^{\circ}\text{C}$
Torque	RecommendedHM6H	3H 4 .7	N·m
Torque	RecommendedHM6H	3H 4 .7	N·m
Weight		92	g

Thermal Characteristics

Symbol	
--------	--

Performance Curves

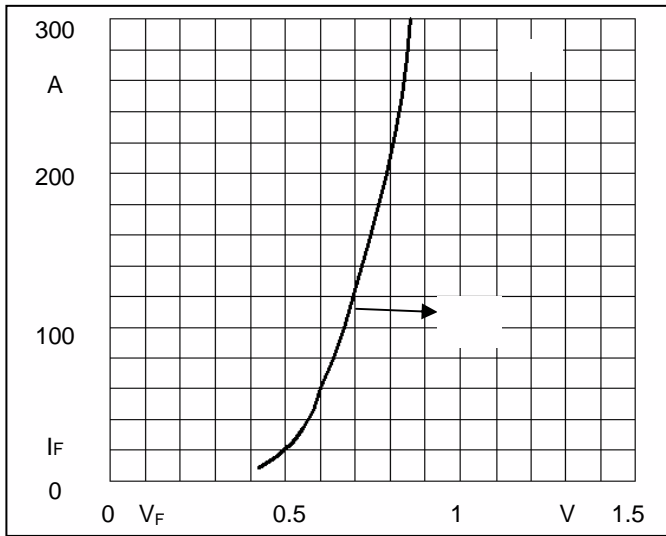


Fig1. Forward Voltage Drop vs Forward Current

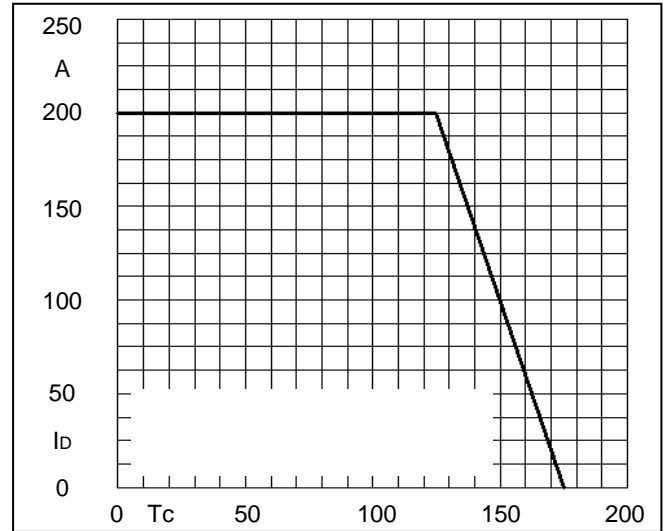


Fig2. Forward Current Derating Curve

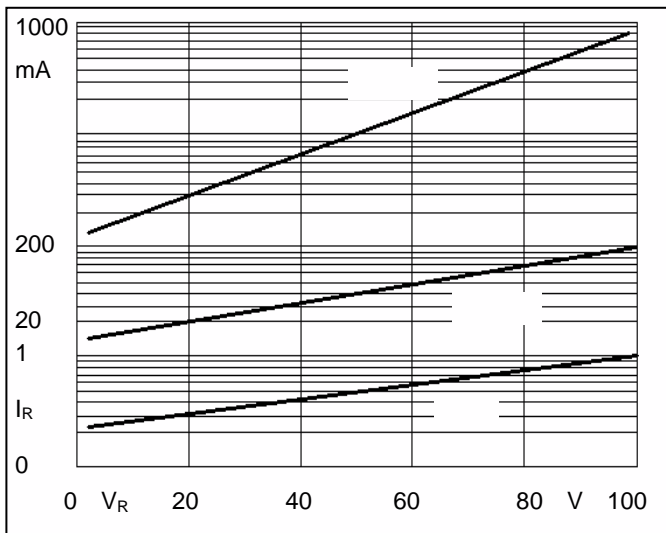


Fig3. Typical Reverse Current



Package Outline Information

