



MD700C(A/K)-GD6


Ⓜ

MD700C12GD6	MD700A12GD6	MD700K12GD6	1200V	1300V	V
MD700C14GD6	MD700A14GD6	MD700K14GD6	1400V	1500V	V
MD700C16GD6	MD700A16GD6	MD700K16GD6	1600V	1760V	V
MD700C18GD6	MD700A18GD6	MD700K18GD6	1800V	2000V	V

IFAV	Single phase ,half wave 180° conduction Tc=100	700	A
IFSM	t=10ms T _{vj} =T _{vjM}	21000	A
i ² t	t=10ms T _{vj} =T _{vjM}	2205000	A ² s
V _{isol}	a.c.50HZ;r.m.s.;1min,I _{iso} :2mA(max)	2500	V
T _{vj}		-40 to 150	
T _{stg}		-40 to 125	
Mt	To terminals(M10)	12±15%	Nm
Ms	To heatsink(M6)	6±15%	Nm
Weight	Module (Approximately)	1550	g



MD700C(A/K)-GD6

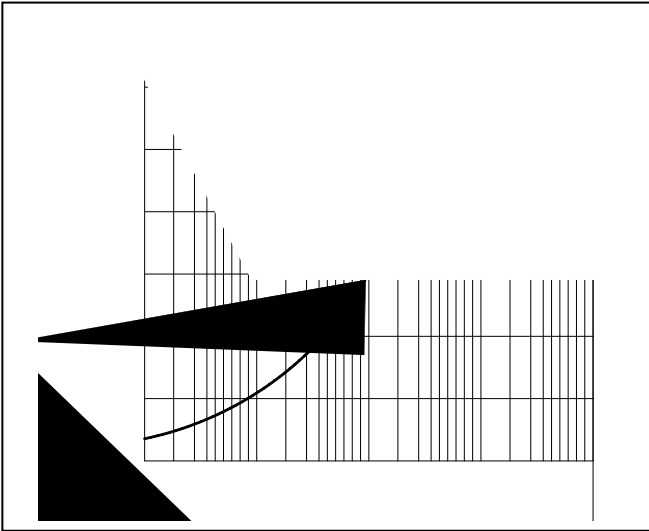



MD700C(A/K)-GD6