

M>6)8\$;\$\*<E'

---

			MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
--	--	--	----------------------	-------------------------	----------------------------	---------------



M>6)8\$; \$\* <E'

9`YWhf]WU`7 \UfUWhYf]gh]Wg' (T<sub>J</sub>=25 unless otherwise noted)

DUfU a YhYf'	Gm a Vc''	7cbX]h]cbg'	A]b'	Hmd'	AUI'	I b]hg'
GhU]W'DUfU a YhYf'						

**M>6)8\$; \$\* <E'**

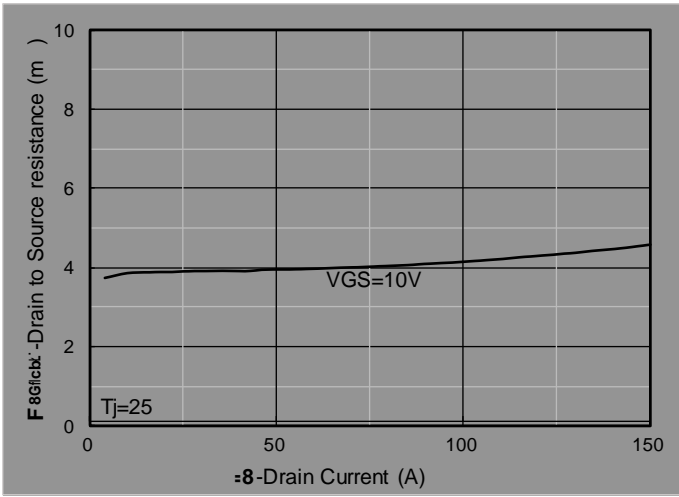


Figure 7: RDS(on) VS Drain Current




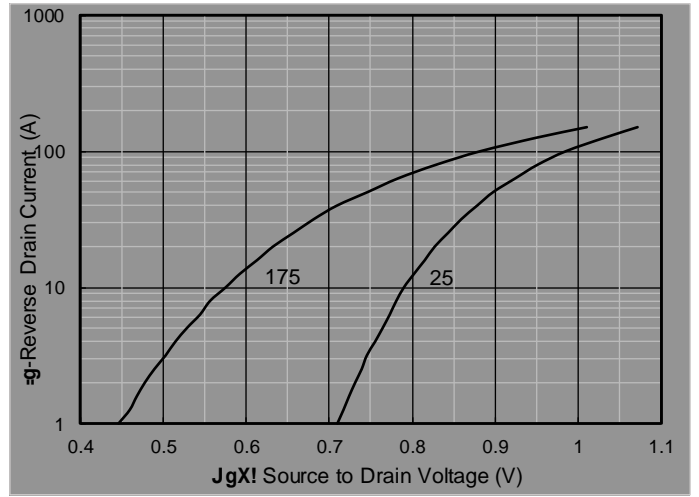


Figure 8: Forward characteristics of reverse diode

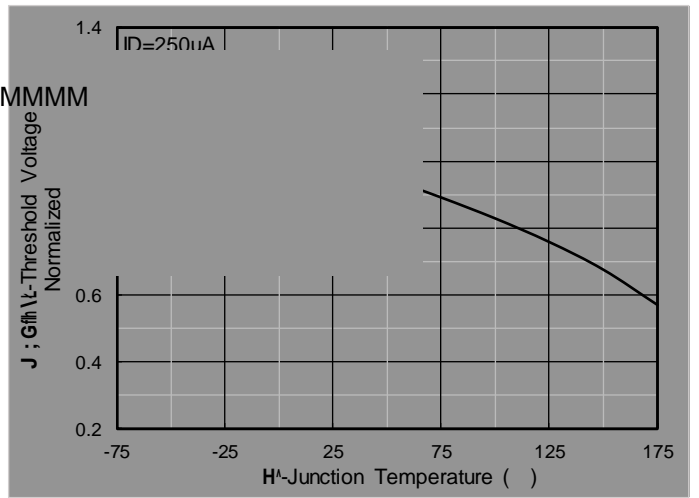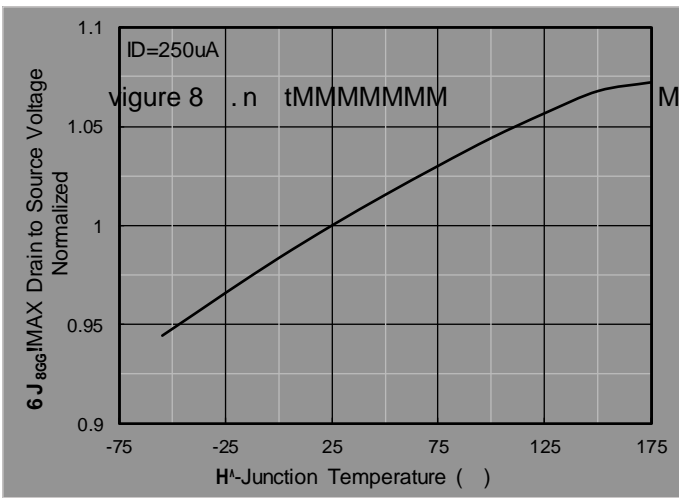

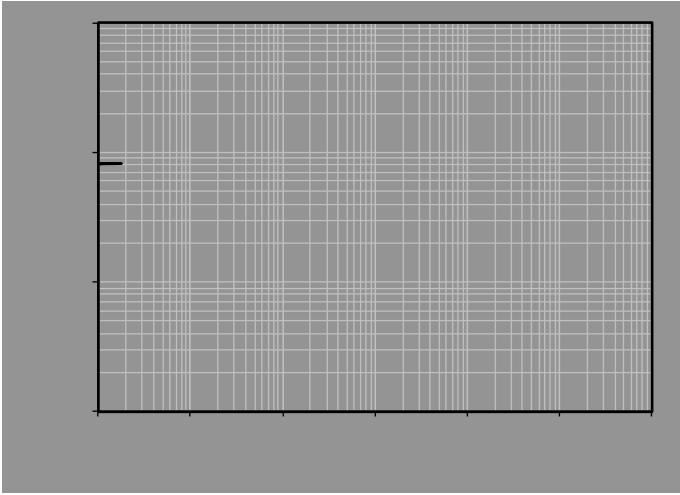

M>6)8\$; \$\* <E'

---



HC!&\* '!<M'DUW\_U[Y']bzcf a Uh]cb

SYMBOL	MIN.	
	A2	0.000
b2		0.050
c		
c2		
D2		
E		
E1		

'LVFODLPHU

7KH LQIRUPDWLRQ SUHVHQWHG LQ WKLV <DQJ> KRXVH QDQV MIRHU (WHIHFWURQ HFRQRQFH QRO  
ULJKW WR PDNH FKDQJH RU ZWLVK RXSWHQR SDURVLXFWV RIGWVSOD\HG KHUHLQ WRGLHPSLURQY  
RWKHU ZLVH

7KH SURGXFW OLVWJH GHWHULREH LXV BSHZLWHKFDXWR RERW DYRUQRWHGLQV P JHGH FDO OLIH  
VDYLQJ OLIVXVWD <DQJ> R UODLQD QDR QXIPMV ERKU DLSREQOLELQRW \DQJGQPDUH  
VXFK LPSURSHU XVH RI VDOH

7KLV SXEOLFDFWLRQ SXODFHUW DGDVLQURQ PDVXLSRQLSHGHYRUR XDGGLRQLRSDOD VQRHJLWWRSX  
ZZZ \DQJMLHRFRPRQVXOW \RXUH QH DDFHW R DQJWKWD OFH