



CfXYf]b['-bZcf a Uh]cb'(Example)

DF9 : 9F98 'D#B'	D57 ?=B ; 7C89'	Auf_]b['	A=B=A I A' D57 ? 5 ; 9fidWgŁ	=BB9F'6CL' E I 5BH-HMfidWgŁ	C I H9F'75FHCB' E I 5BH-HMfidWgŁ	89@=J9FM'AC89
YJGD20G10BQ	F1	YJGD20G10B	5000	10000	100000	13" reel

BACGfi8]Y%#8]Y&Ł 9'YWhf]WU'' 7 \UfUWhYf]gh]Wg'(T_J=25 unless otherwise noted)

DUFU a YhYf'	Gm a Vc''	7 cbX]h]cbg'	A]b'	Hmd'	AUI'	I b]hg'
GhUh]W' DUFU a YhYf'						
Drain-Source Breakdown Voltage	BV _{DSS}	V _{GS} = 0V, I _D =250μA	100			V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} =100V, V _{GS} =0V			1	μA
Gate-Body Leakage Current	I _{GSS}	V _{GS} = ± 20V, V _{DS} =0V			± 100	nA
Gate Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D =250μA	1.0	1.8	2.5	V
Static Drain-Source On-Resistance	R _{DS(on)}	V _{GS} = 10V, I _D =20A		16	22	m
		V _{GS} = 4.5V, I _D =10A		18	27	
Diode Forward Voltage	V _{SD}	I _S =20A, V _{GS} =0V		0.9	1.3	V
Gate Resistance	R _g	f=1MHz		1.5		
8mbU a]W' DUFU a YhYfg						
Input Capacitance	C _{iss}	V _{DS} =25V, V _{GS} =0V, f=1MHZ		1240		pF
Output Capacitance	C _{oss}			740		
Reverse Transfer Capacitance	C _{rss}			25		
Gk]hW\]b[' DUFU a YhYfg						
Total Gate Charge	Q _g	V _{GS} =10V, V _{DS} =50V, I _D =20A		17		nC
Gate-Source Charge	Q _{gs}			6		
Gate-Drain Charge	Q _{gd}			3		
Reverse Recovery Chrage	Q _{rr}	I _F =20A, di/dt=100A/us		42		
Reverse Recovery Time	t _{rr}			40		
Turn-on Delay Time	t _{D(on)}	V _{GS} =10V, V _{DD} =50V, I _D =20A R _{GEN} =3.0		40		ns
Turn-on Rise Time	t _r			12		
Turn-off Delay Time	t _{D(off)}			55		
Turn-off fall Time	t _f			16		

- A. Repetitive rating; pulse width limited by max. junction temperature.
- B. V_{DD}=50V, R_G=25 , L=2mH, I_{AS}=9A.
- C. Pd is based on max. junction temperature, using junction-case thermal resistance.
- D. The value of R_{JA} is measured with the device mounted on 1in2 FR-4 board with 2oz. Copper, in a still air environment with TA =25° C. The Power dissipation PDSM is based on R_{JA} t_{10s} and the maximum allowed junction temperature of 150° C. The value in any given application depends on the user's specific board design.



'BACGf18]Y%#8]Y&l`Hmd]WU`DYfZcf a UbWY`7 \UfUWhYf]gh]Wg

Figure1. Output C

M> ; 8&\$; %\$6 E

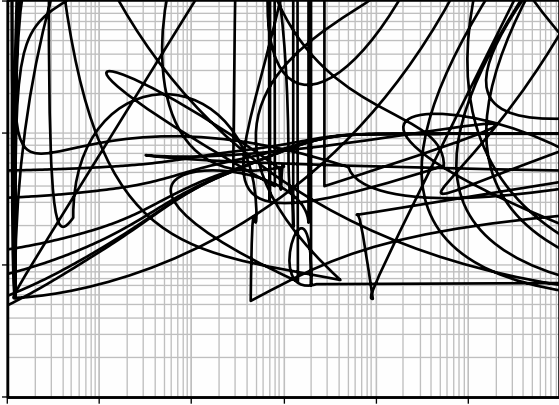


Figure 13. Maximum Transient Thermal Impedance

Figure 14. Safe Operation Area

M> ; 8&\$; %\$6 E



8]gW'U]a Yf'

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

lcab ä IM orYo '