



N-Channel Enhancement Mode Field Effect Transistor

Product Summary

V_{DS}	20 V
I_D	0.5 A
$R_{DS(ON)}$ (at $V_{GS}=4.5V$)	300 mohm
$R_{DS(ON)}$ (at $V_{GS}=2.5V$)	400 mohm
$R_{DS(ON)}$ (at $V_{GS}=1.8V$)	700 mohm
ESD Protected Up to 2.0KV (HBM)	

General Description

Trench Power LV MOSFET technology
High Power and current handing capability

Applications

PWM application
Load switch

Absolute Maximum Ratings ($T_A=25$ unless otherwise noted)

Parameter	Symbol	Limit
-----------	--------	-------



YJL3134KAT

Electrical Characteristics ($T_J=25$ unless otherwise noted)

Parameter	Symbol	Conditions	Min	Typ	Max	Units
-----------	--------	------------	-----	-----	-----	-------



YJL3134KAT

Typical Electrical Characteristics of JETQ69819 rework BT/F2 10Tf1 01 3004 Tm00(T)-1aJETQ69819 rework

YJ



YJL3134KAT



Figure 13. Maximum Transient Thermal Impedance

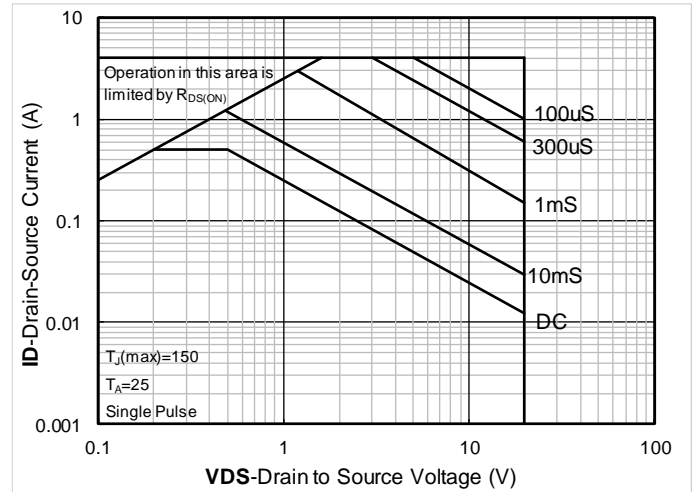


Figure14. Safe Operation Area

YJL3134KAT

