

ZP1100- RECTIFIER DIODE


5800-6500V_{RRM}

GENERAL PURPOSE HIGH POWER STANDARD RECTIFIER

Features:

- . All diffused structure
- . High surge rating
- . Blocking capability up to 6500 volts
- . Ceramic housing hermetic package
- . Pressure assembled device

D8C

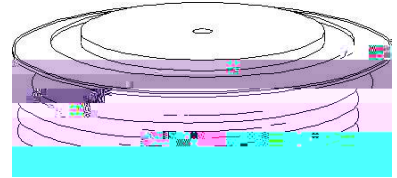

ELECTRICAL CHARACTERISTICS AND RATINGS

Reverse Blocking


V_{RRM} Repetitive peak reverse voltage
 $V_{RSM} = \frac{2}{\sqrt{2}} V_{RRM}$ Non repetitive peak reverse voltage (2)

H

БВ!

б б

H

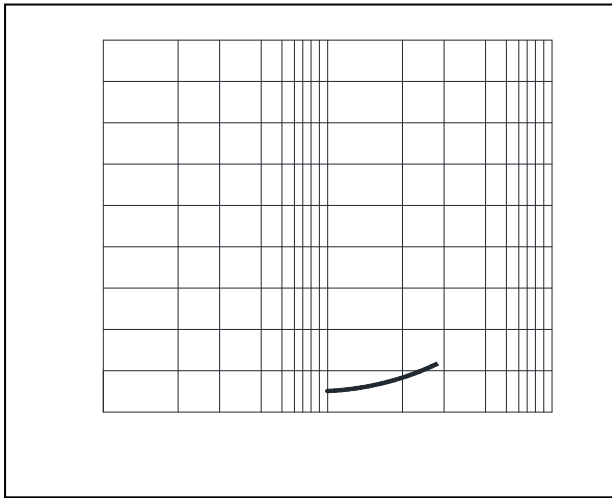



CASE OUTLINE AND DIMENSIONS