

ZP6000- RECTIFIER DIODE


1800-2400V_{RRM}

GENERAL PURPOSE HIGH POWER STANDARD RECTIFIER

Features:

- . All diffused structure
- . High surge rating
- . Blocking capability up to 2400 volts
- . Ceramic housing hermetic package
- . Pressure assembled device

D15C

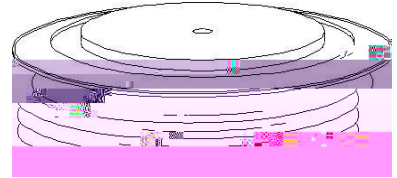

ELECTRICAL CHARACTERISTICS AND RATINGS

Reverse Blocking

V_{RRM} = Repetitive peak reverse voltage
 V_{RSM} = Non repetitive peak reverse voltage (2)

--	--	--	--

Conducting - on state

Parameter	Symbol	Min.	Max.	Typ.	Units	ž™
-----------	--------	------	------	------	-------	----



CASE OUTLINE AND DIMENSIONS