



# 400V RECTIFIER DIODE


3800-4500V<sub>RRM</sub>

\*\*\*\*\*  
\*\*\*\*\*  
\*\*\*\*\*

Fea

D16C

- . High surge rating
- . Blocking capability up to 4500 volts
- . Ceramic housing hermetic package
- . Pressure assembled device

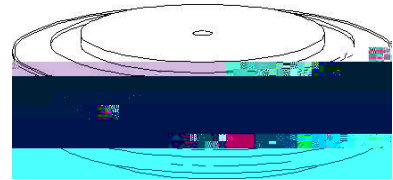



## ELECTRICAL CHARACTERISTICS AND RATINGS

### Reverse Blocking

$V_{RRM}$  = Repetitive peak reverse voltage  
 $V_{RSM}$  = Non repetitive peak reverse voltage (2)

--	--	--

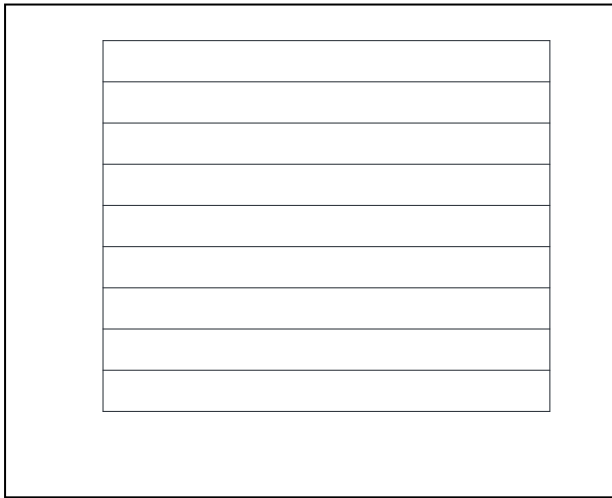

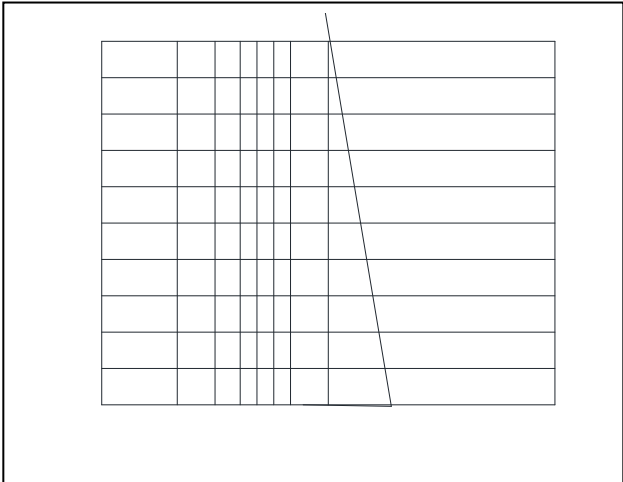

CASE OUTLINE AND DIMENSIONS

