

KS800-Bidirectional thyristor

4000-4500 V_{DRM}

Gating

Parameter	Symbol	Min.	Max.	Typ.	Units	Conditions
					W	
					W	


Dynamic

Parameter	Symbol	Min.	Max.	Typ.	Units	Conditions
					s	
					s	;

THERMAL AND MECHANICAL CHARACTERISTICS AND RATINGS

Parameter	Symbol	Min.	Max.	Typ.	Units	Conditions
					°C	
					°C	
					°C/W	
					°C/W	
					kN	
					kg	

Mounting surfaces smooth, flat and greased

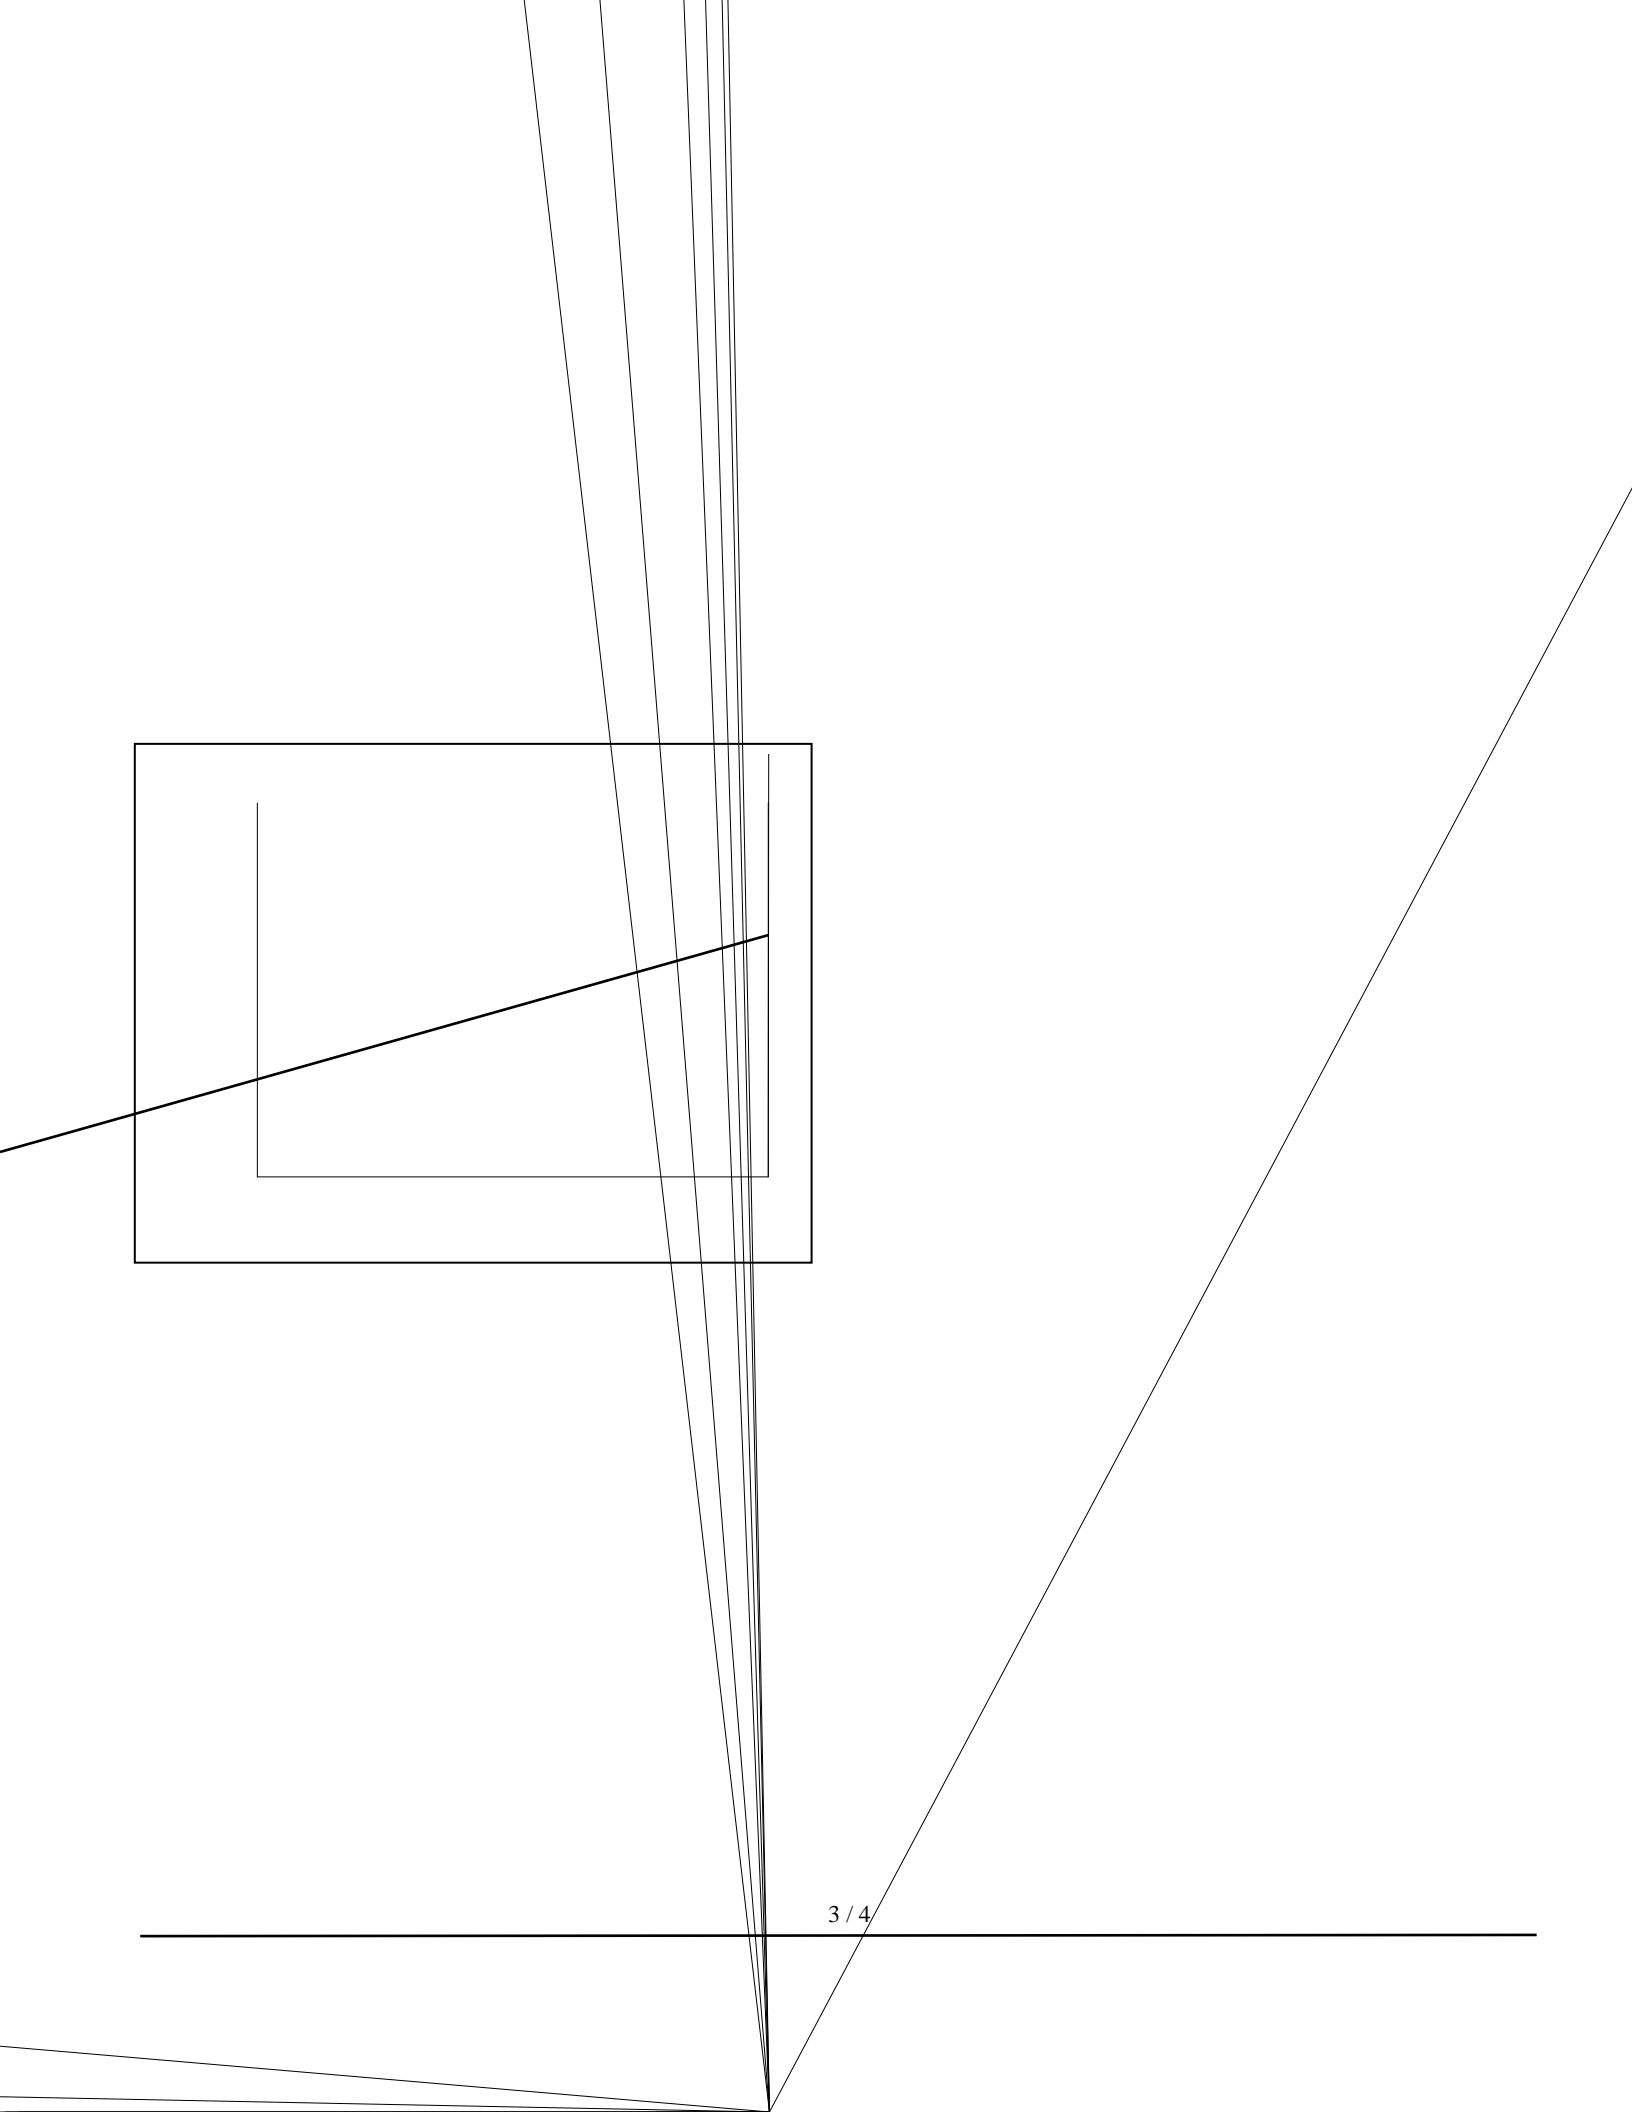

CASE OUTLINE AND DIMENSIONS

