



ESD2402EQ

Maximum Ratings


PARAMETER	SYMBOL	LIMITS	UNIT
Peak pulse power ($t_p = 8/20\mu s$)	P_{pk}	300	W
ESD according to IEC61000-4-2 air discharge	V_{ESD}	± 30	KV
ESD according to IEC61000-4-2 contact discharge		± 30	
Junction temperature	T_J	-55~150	

Storage temperature 1 0

v & KDUDFWHULVWLFV 7\SLFDO

)LJ & DSDFLWDQFH YV %LD


& DSDFLWDQFH S)

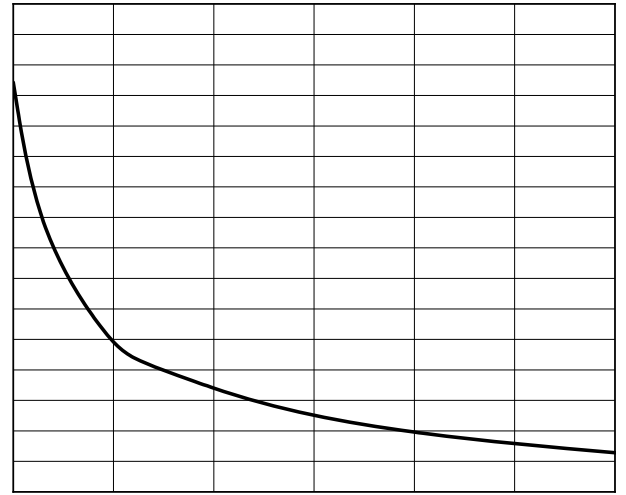

%LDV 9ROWDJH 9

RI 5DWHG 3RZHU ,


)LJ 3RZHU 'HUDWLQJ & XUYH

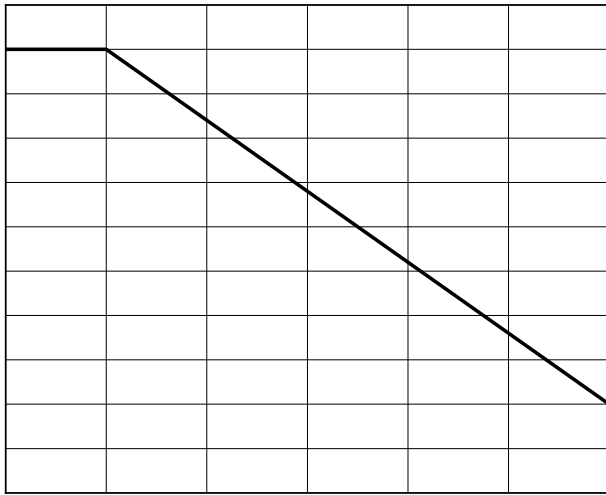

\$PELHQW 7HPSHUDWXUH 7

)LJ V 3XOVH :DYHIRUP

3HDN 3XOVH & XUYHQ

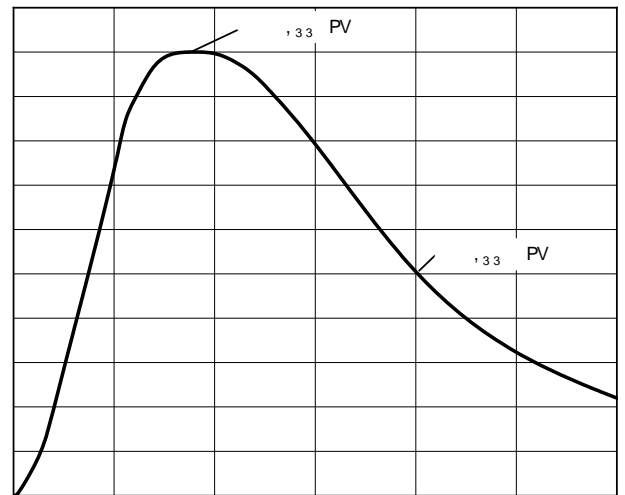

7LPPV

