


## Schottky Diodes

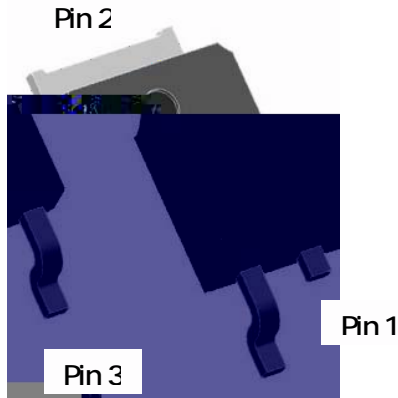

### Features

- High frequency operation
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Guard ring for enhanced ruggedness and long term reliability
- Part no. with suffix "Q" means AEC-Q101 qualified

V (Ta=25As unless otherwise specified)



PARAMETER	SYMBOL	UNIT	MBR1045CDQ
Device marking code	-	-	MBR1045CD
Repetitive peak reverse voltage	$V_{RRM}$	V	45
Average Rectified Output Current @60Hz -sine wave $T_C=120$	$I_O$	A	10
Forward Surge Current (Non-repetitive) @60Hz Half-sine wave, 1 cycle, $T_a=25$	$I_{FSM}$	A	120
Current Squared Time @1ms t 8.3ms $T_J=25$	$I^2t$	A <sup>2</sup> s	60
Storage Temperature	$T_{stg}$		-55 ~ +150
Junction Temperature	$T_J$		-55 ~ +150

### Electrical Characteristics $T_a=25$ Unless otherwise specified

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	Typ	Max	
Instantaneous forward voltage per diode	$V_F$	V	$I_F=5A$ $T_J=25$	0.51	0.58	
			$I_F=5A$ $T_J=125$	0.45	0.55	
Typical junction capacitance per diode	$C_J$	pF	$V_R=4V$ , $f=1$ MHz	270	-	
Instantaneous reverse current per diode	$I_R$	mA	$V_R=45V$	$T_J=25$	-	0.1
				$T_J=125$	-	100



### Thermal Characteristics $T_a=25$ Unless otherwise specified

PARAMETER	SYMBOL	UNIT	MBR1045CDQ
Typical thermal resistance per diode Between junction and case	$R_{JC}$	/W	5



## Characteristics (Typical)

Fig.1:Forward Current Derating Curve

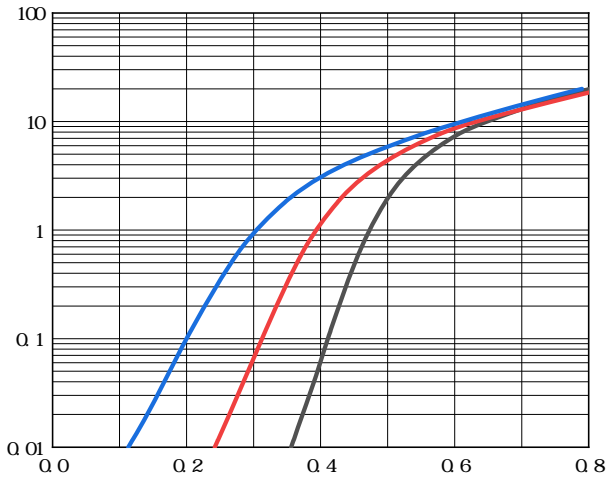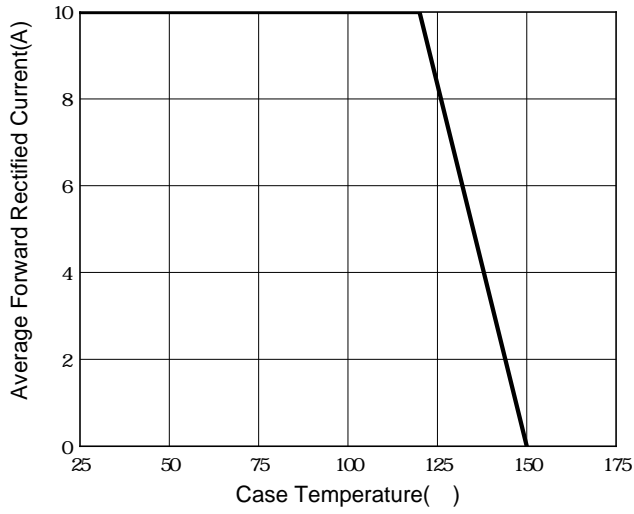



# MBR1045CDQ

## Ordering Information (Example)

PREFERED P/N	UNIT WEIGHT(g)	MINIIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
MBR1045CDQ	Approximate 0.32	2500	2500	25000	Reel

Ou °



## MBR1045CDQ

---

### Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with automotive electronics, are not designed for use in medical, lifesaving, lifesustaining, or military, Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.