


Zener Diodes, 40 Watt Peak Power Dual Common Anode Zeners

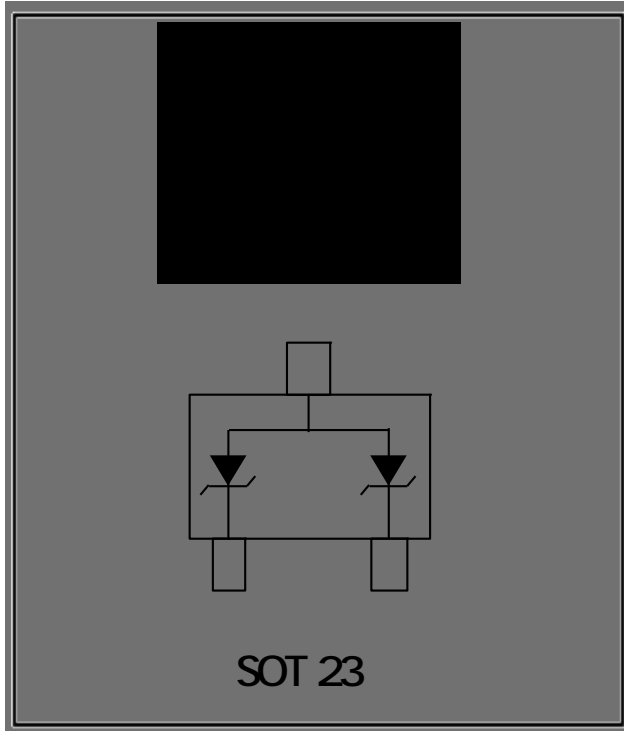

Features

- " 627i 3DFNDJH \$OORZV (LWKHU 7ZR 6H
- 8QLGLUHFWLRQDORQRQRUJXU6LQJOH
- %LGLUHFWLRQDO &RQILJXUDWLRQ
- " 3HDN 3RZHU :# PV 8QLGLUHFWLRQD
- " 7UDQVLHQW SURWHFWLRQ IRU HDFK O
- ,(& (6' "9 RQWDFW " N9 DLU
- " (6' 5DWLQJ &ODVSHU WKH +%0
- " 0D[LPXP &ODPSLQJ 9ROWDJH#3HDN 3XO
- " 5R+6 &RPSOLDQW
- " 3DUW QR ZLWKHDXQVL\$ (% 4 TXDOLILH


Applications

- " 7HVW (TXLSPHQW ,QVWUXPHQWDWLRQ
- " 1RWHERRNV 'HVNWRSV 6HUYHUV
- " &RPSXWHU 3HULSKHUDOV
- " \$XWRPRWLYH DSSOLFDWLRQV

Mechanical Data

- " 3DFNDJH 627
- " /HDG)LQLVK 0DWWH 7LQ
- " &DVH 0DWHULDO 3*UHHQ' 0ROGLQJ &R
- " 0RLVWXUH 6HQVLWLYLW\ /HYHO SHU

Definitions of electrical characteristics

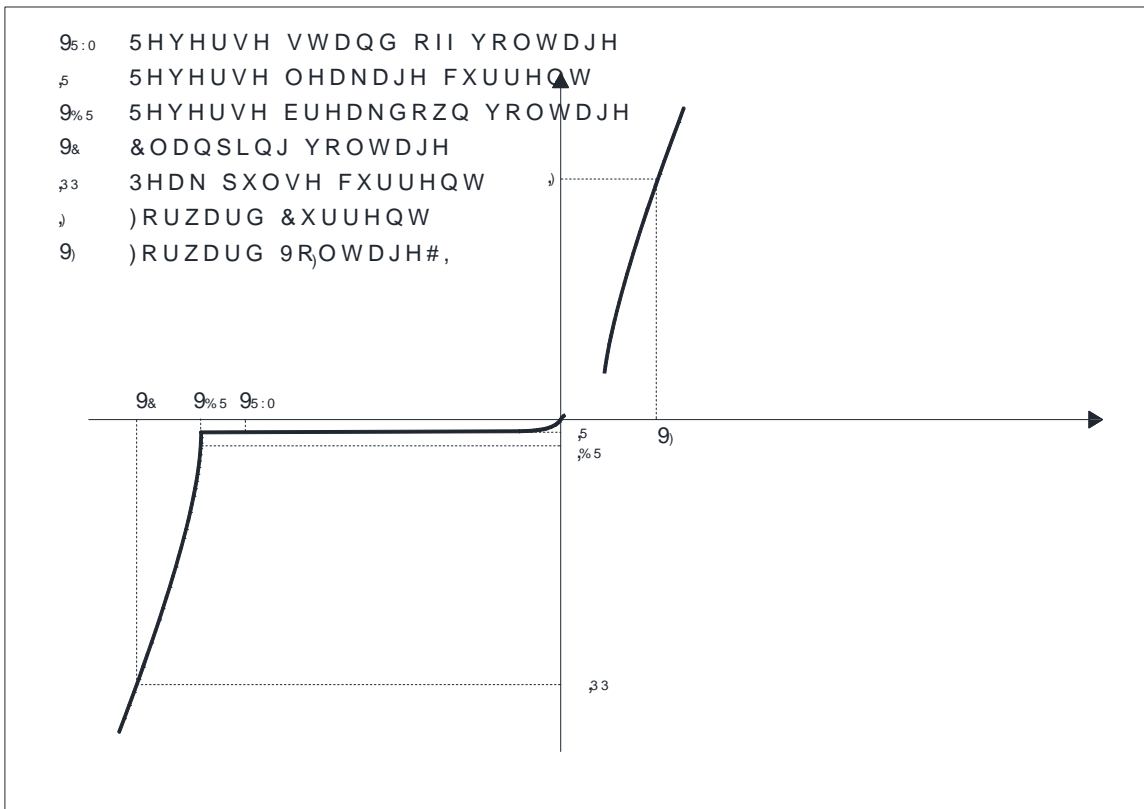




MMBZ27VAQ

Maximum Ratings


PARAMETER	SYMBOL	LIMITS	UNIT
3 HDN SXOVH ₃ SRZHU W	3_{SN}		:
(6' DFFRUGLQJ WR ,(& DLU GLVFKDUJH	$9_{(6'}$	"	.9
(6' DFFRUGLQJ WR ,(& FRQWDFW GLVFKDUJH		"	

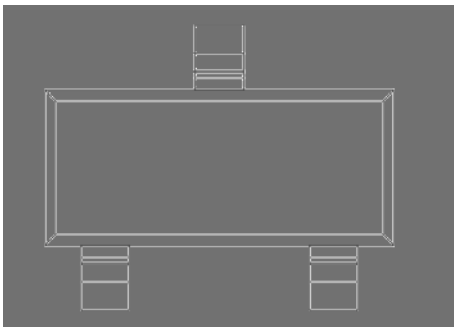



MMBZ27VAQ

3RZHU 'LVVLSDWLRQ P: vCharacteristics 7\SLFDO
)LJ . 3

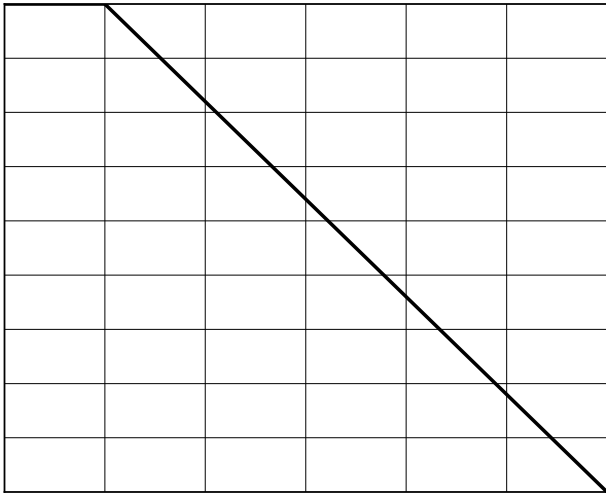


7s



3HDN 3XOVH 'HUDWLQJ , Q 2I 3HDN 3RZHU
2U &XUUHQW#7


)LJ 3RZHU 'HUDWLQJ &XUYH

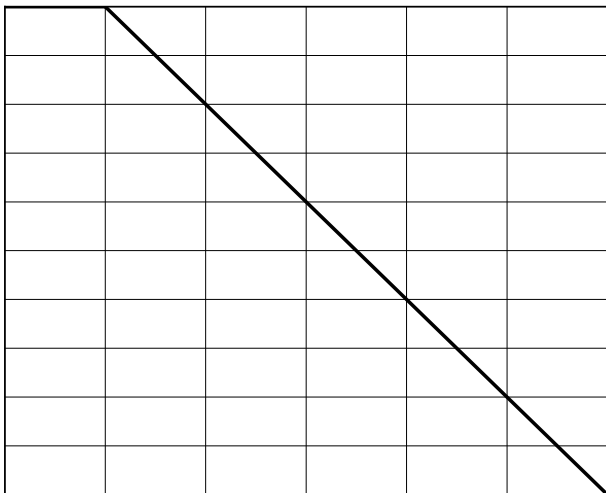

\$PELHQWUDW\$H 7

MMBZ27VAQ

vOutline Dimensions

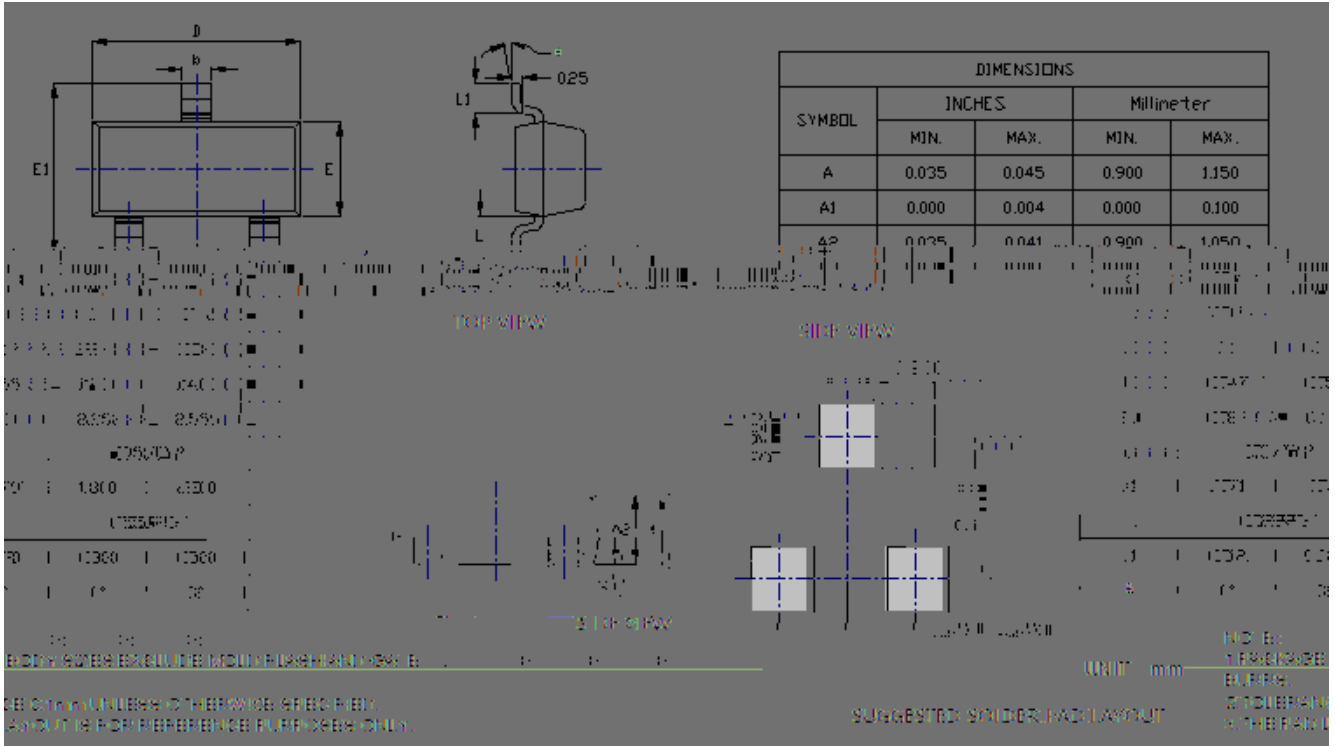

MMBZ27VAQ
