


PNP General Purpose Amplifier

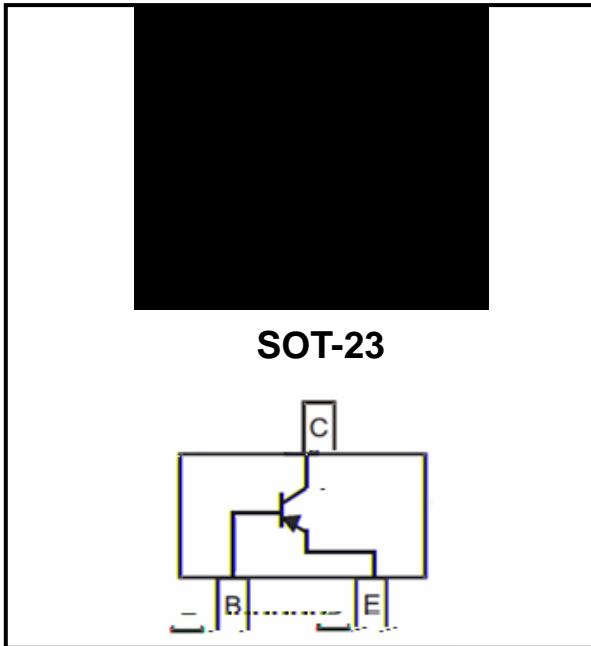

Features

- Epoxy meets UL-94 V-0 flammability rating
- Surface mount package ideally suited for automatic insertion
- Moisture Sensitivity Level 1
- Low equivalent on-resistance
- Part no. with suffix "Q" means AEC-Q101 qualified

Mechanical Data

- Package: SOT-23
- Terminals: Tin plated leads, solderable per J-STD-002 and JESD22-B102
- Marking 591

Maximum Ratings (Ta=25 Unless otherwise specified)


Item	Symbol	Unit	Value
Collector-Base Voltage	V_{CBO}	V	-80
Collector-Emitter Voltage	V_{CEO}	V	-60
Emitter-Base Voltage	V_{EBO}	V	-5
Collector Current	I_C	A	-1
Collector Power Dissipation	P_C	mW	300
Thermal Resistance From Junction to Ambient (*)	R_{JA}	/W	417
Junction Temperature	T_J		150
Storage Temperature	T_{STG}		-55 to +150

(*) Device mounted on FR-4 PCB 1.0 x 1.0 x 0.06 inch

v(OHFWULFDO & KÄZIDFVAHULVWLFV



Electrical Characteristics (Typical)

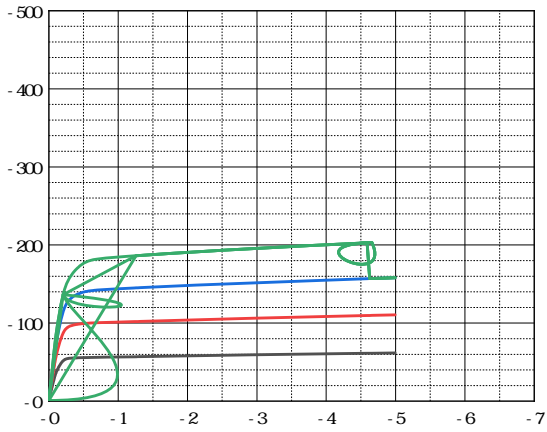

SOT-23 Package Outline Dimensions & Suggested Pad Layout

TOP VIEW

SIDE VIEW



UNIT mm

SUGGESTED SOLDER PAD LAYOUT

