

Dual NPN Small Signal Transistor



Features

- Epoxy meets UL-94 V-0 flammability rating
- Surface mount package ideally Suited for Automatic Insertion
- Reduces number of components and board space
- Part no. with suffix "Q" means AEC-Q101 qualified

Application

Ideal for low power amplification and switching


Mechanical Data

Package: SOT-363

Terminals: Tin plated leads, solderable per J-STD-002 and JESD22-B102

Marking: K1P

Equivalent circuit



Max v a p S

	I_{CO}	V	6
Collector Current -Continuous	I_C	mA	6 \$ \$
Total Device Dissipation ^(*)	P_D	mW	2 \$ \$
Thermal Resistance > junction to Ambient	$R_{th>A}$	K/W	62)
> junction Temperature	T_j		150
Storage Temperature	T_{STG}		-55 to +150

(*) Device mounted on FR-4 PCB 1.0 x 1.0 x 0.06 inch




Electrical Characteristics (Ta=25 unless otherwise specified)

Item



Marking Information

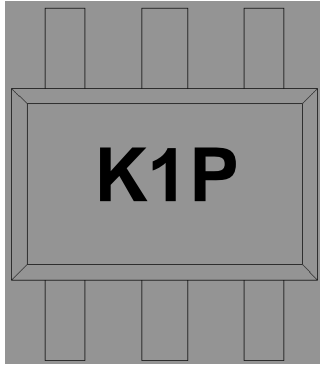

Note:

1. All marking is at middle of the product body
2. All marking is in laser marking
3. K1P is Marking Code
4. Body color: Black



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with automotive electronics are not designed for use in medical, life-saving, lifesustaining, or military, Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.