

Digital Transistors (Built-in Resistors)


Features

- Epoxy meets UL-94 V-0 flammability rating
- Moisture Sensitivity Level 1
- Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistors
- Surface mount package ideally Suited for Automatic Insertion
- PNP

Mechanical Data

- Package:** SOT-23
- Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- Marking:** 54

Equivalent circuit

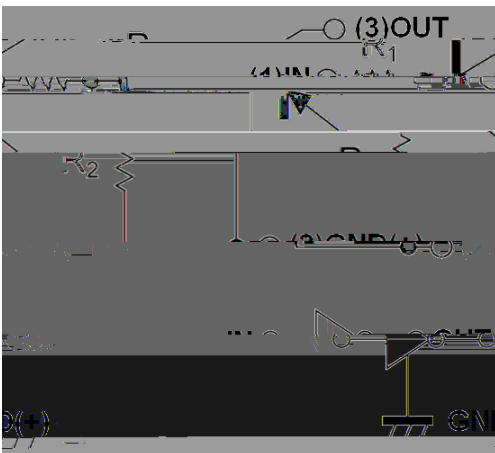

Maximum Ratings (Ta=25 Unless otherwise specified)

ITEM	SYMBOL	UNIT	VALUE
Supply Voltage	V_{CC}	V	-50
Input Voltage	V_{IN}	V	-40 to +6
Output Current	I_o	mA	-100
Power Dissipation	P_D	mW	200
Junction Temperature	T_j		150
Storage Temperature	T_{STG}		-55 to +150



DTA114YCA

Electrical Characteristics (Ta=25 unless otherwise specified)

DTA114YCA

