



DTA124ECA

RoHS
COMPLIANT

of

Electrical Characteristics

Item	Symbol	Unit	Conditions	Min	Typ	Max

Thermal Characteristics

Parameter	Symbol	Unit	Value

Ordering Information

Preferred P/N	Packing code	Unit weight(g)	Minimum package(pcs)	Inner box quantity(pcs)	Outer carton quantity(pcs)	Delivery mode



DTA124ECA

RoHS
COMPLIANT

of

Characteristics

Fig. 1 - DC Current Gain Characteristics

Fig. 2 - Input Voltage (on) Characteristics

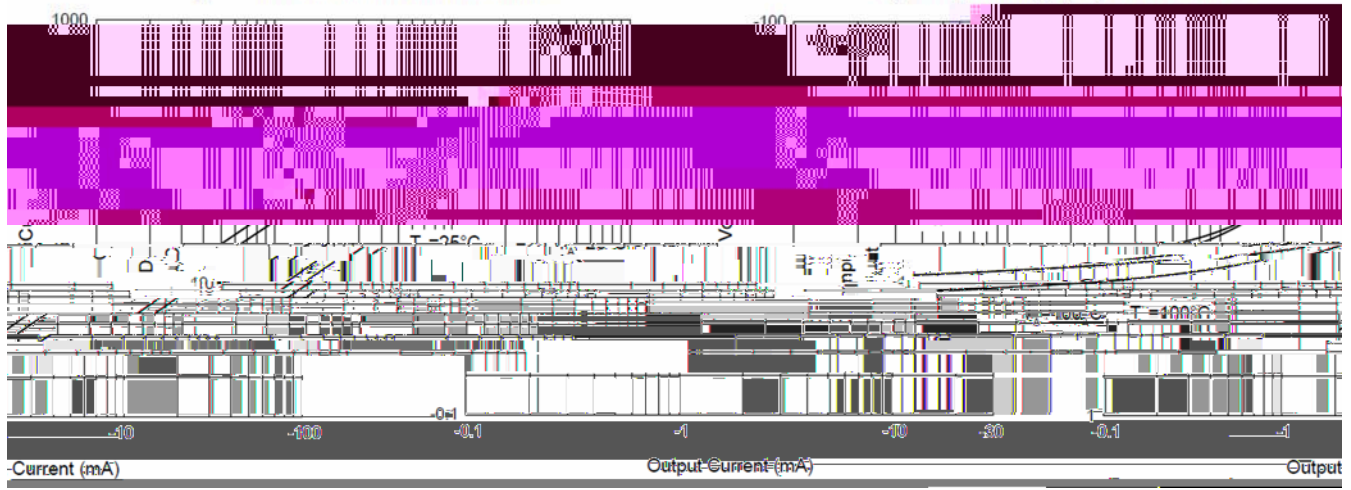


Fig. 1 - DC Current Gain Characteristics

Fig. 2 - Input Voltage (on) Characteristics


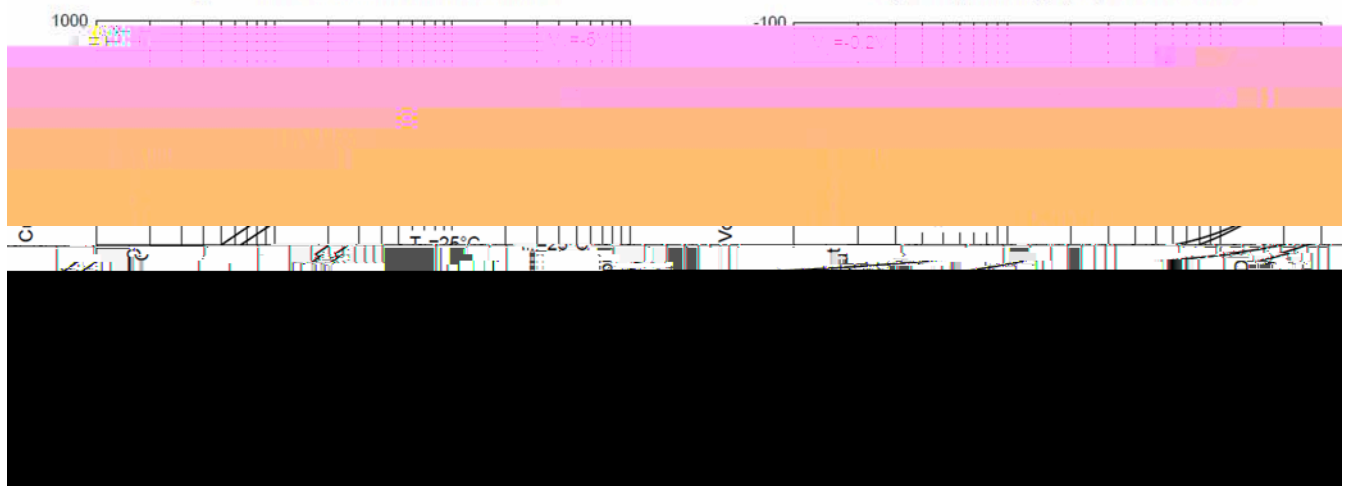


Fig. 5 - Power Derating Curve





Outline Dimensions

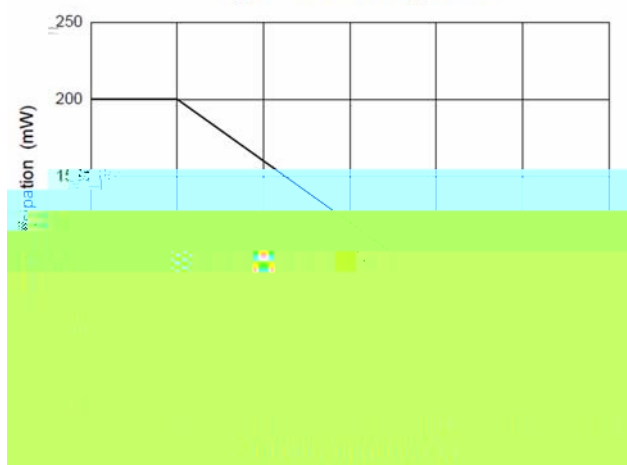

Note:

1. All dimensions are in millimeters (mm), unless otherwise specified.

[所有尺寸均以毫米为单位，除非另有说明]

2. General tolerances, unless otherwise specified, are as follows:

通用公差为±0.10mm，除非另有说明。

3. Dimensions and tolerances per ASME Y14.5M-2018.

[尺寸和公差遵循ASME Y14.5M-2018标准]

exceed 0.15 mm in maximum.

切口残留的尺寸最大不得超过0.15mm

所有尺寸均不包括毛刺和切口残留毛刺与部分

所有尺寸均不包括毛刺和切口残留毛刺与部分

尺寸b不包括单边最大0.100mm的冲筋凸出

尺寸b不包括单边最大0.100mm的冲筋凸出

尺寸b不包括单边最大0.100mm的冲筋凸出

DTA124ECA
