





Moisture Sensitivity Level 1  
 Surface mount package ideally Suited for Automatic  
 Insertion  
 Epoxy meets UL-94 V-0 flammability rating, halogen-fr  $\hat{A}$  -fr

: SOT-523  
 : Tin plated leads, solderable per  
 J-STD-002 and JESD22-B102  
 06

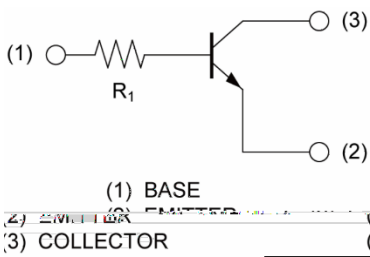


(Ta=25 Unless otherwise specified)




				-55 to +150
Storage Temperature	T <sub>STG</sub>			-55 to +150



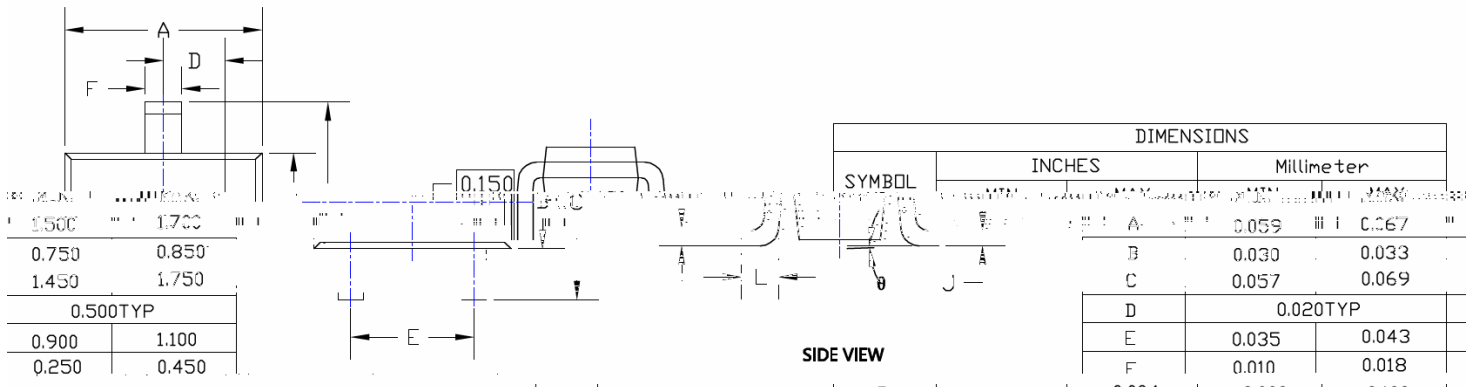

Note:

1. All dimensions are in millimeters (mm) unless otherwise specified.

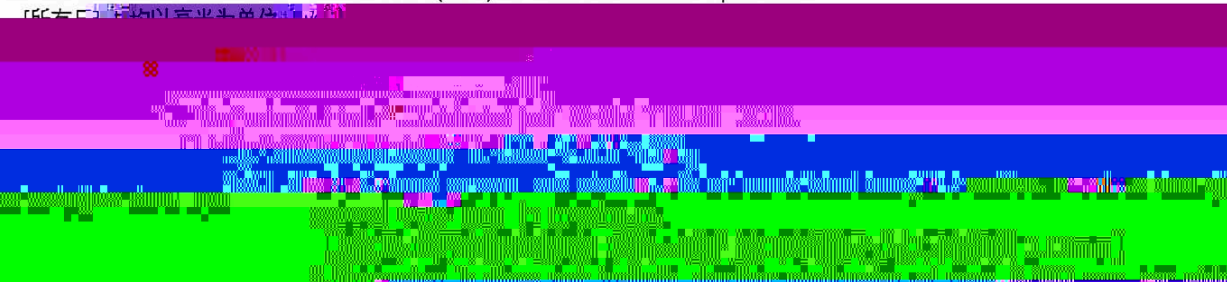



---

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf.