

Ultra-Fast Recovery Diodes 10A FRED



Features

- Adopt FRED chip
- Low forward Voltage drop
- Fast reverse recovery time
- High frequency operation
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Guard ring for enhanced ruggedness and long term reliability

Typical Applications

Typical applications are in switching power supplies, converters, freewheeling diodes, and reverse battery protection.

Mechanical Data

- **Package:** ITO-220AC
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** As marked

:

Repetitive Peak Reverse Voltage	V_{RRM}	V	200
Average Rectified Output Current @60Hz sine wave, R-load, T_c (FIG.1)	I_O	A	10
Surge(Non-repetitive)Forward Current @60Hz half sine-wave, 1 cycle, $T_j=25$	I_{FSM}	A	120
Current Squared Time @1ms≤t≤8.3ms $T_j=25$	I^2t	A ² s	60
Storage Temperature	T_{stg}		-55 ~ +175
Junction Temperature	T_j		-55 ~ +175
Typical Junction capacitance @4V,1MHz	C_j	pF	150
Mounting torque @recommend torque 5kg cm	Tor	kg cm	8



MUR1020F

■Electrical Characteristics


PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	Min	Typ	Max
Instantaneous forward voltage drop per diode	V_{FM}	V	$I_{FM}=10.0A$ @ $T_j=25$	-	0.90	1.0
			$I_{FM}=10.0A$ @ $T_j=150$		0.78	0.9
DC reverse current at rated DC blocking voltage per diode	I_{RRM1}	μA	$V_{RM}=V_{RRM}$ $T_j=25$	-	-	5
	I_{RRM2}		$V_{RM}=V_{RRM}$ $T_j=150$	-	30	50
Reverse Recovery Time	T_{RR}	ns	$I_F=0.5A$ $I_{RM}=1A$ $I_{RR}=0.25A$ $T_j=25$	-	25	35
			$T_j=25$		30	-
			$T_j=125$	-	47	-

$I_F=10A$
 $di/dt=-200A/\mu s$
 $V_{RM}=100V$



■Characteristics (Typical)


FIG.5: Diagram of circuit and Testing wave form of reverse recovery time

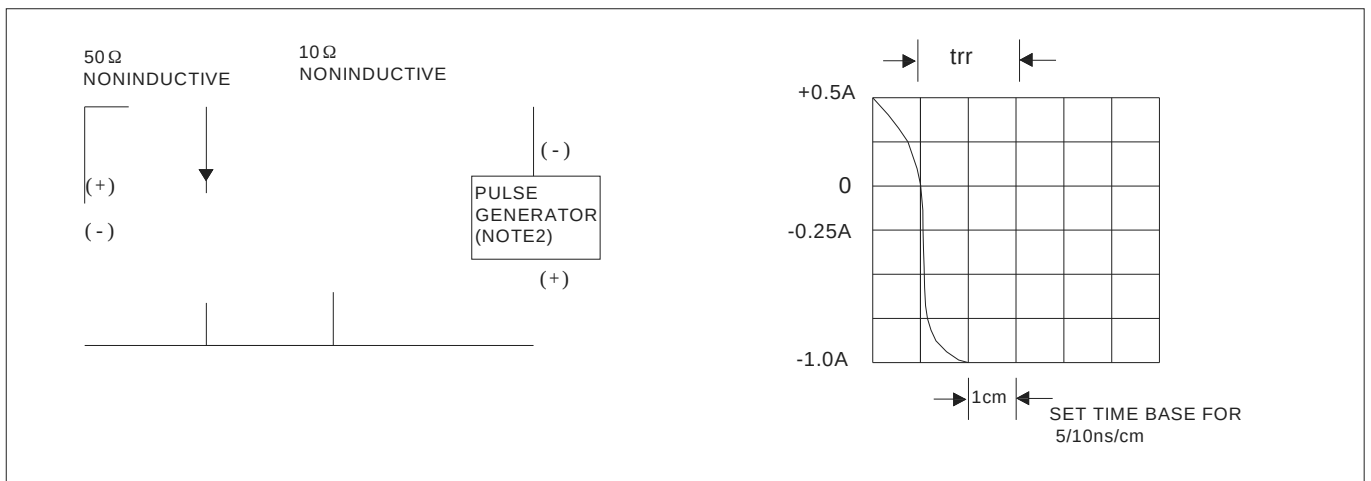



MUR1020F

■Outline Dimensions

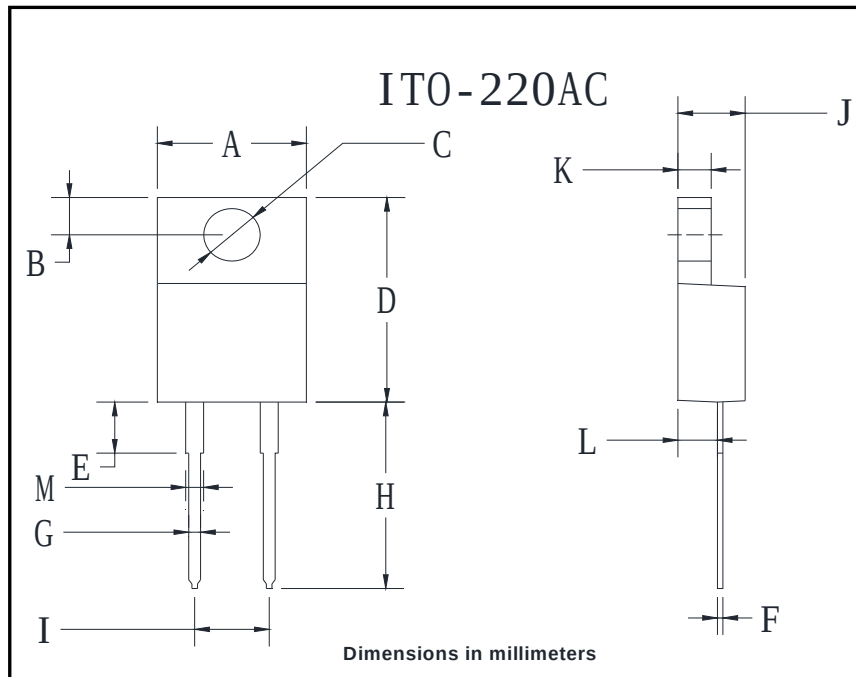

ITO-220AC		
Dim	Min	Max
A	9.8	10.2
B	2.25	2.75
C	2.95	3.45
D	14.75	15.25
E	3.5	4.1
F	0.45	0.75
G	0.45	0.75
H	13.35	14.15
I	4.97	5.23
J	4.3	4.8
K	2.5	2.74
L	2.58	2.82
M	1.03	1.43

