



MBR20F60FCTS-B1-W5094HF

Schottky Diodes

” +LJK IUHTXHQF\ RSHUDWLRQ
” +LJK SXULW\ KLJK WHPSHUDWXUH HSR[\ HQ
HOKDQFHG PHFKDQJ B-OPV\HQOWK6 FRPSO
” Terminals 7LQ SODWHG OHDG

6094HF

Repetitive Peak Reverse Voltage	VRRM	V	60
Average Rectified Output Current @60Hz sine wave, R-load	.2	\$	
6XUJH 1RQ UHSHWLWLYH)RUZDUG &XUUHQW # +]K@LM - a			

--

0D[LPXP LQVWDQWDQHRXV IRUZDUG YROWDJH GURS SHU GLRGH	950	9	8	\$
0D[LPXP '& UHYHUVHFXUUHQW DW UDWHG '& EORFNLOJYROWDJH SHU GLRGH	550		950 9550 7D -	
	.550		950 9550 7D -	


1RWH 3XOVH WHVW X6 SXOVH ZLGK GXW\ F\FOH
1RWH 3XOVH WHVW SXOVH ZLGK P6





MBR20F60FCTS-B1-W5094HF

Outline Dimensions

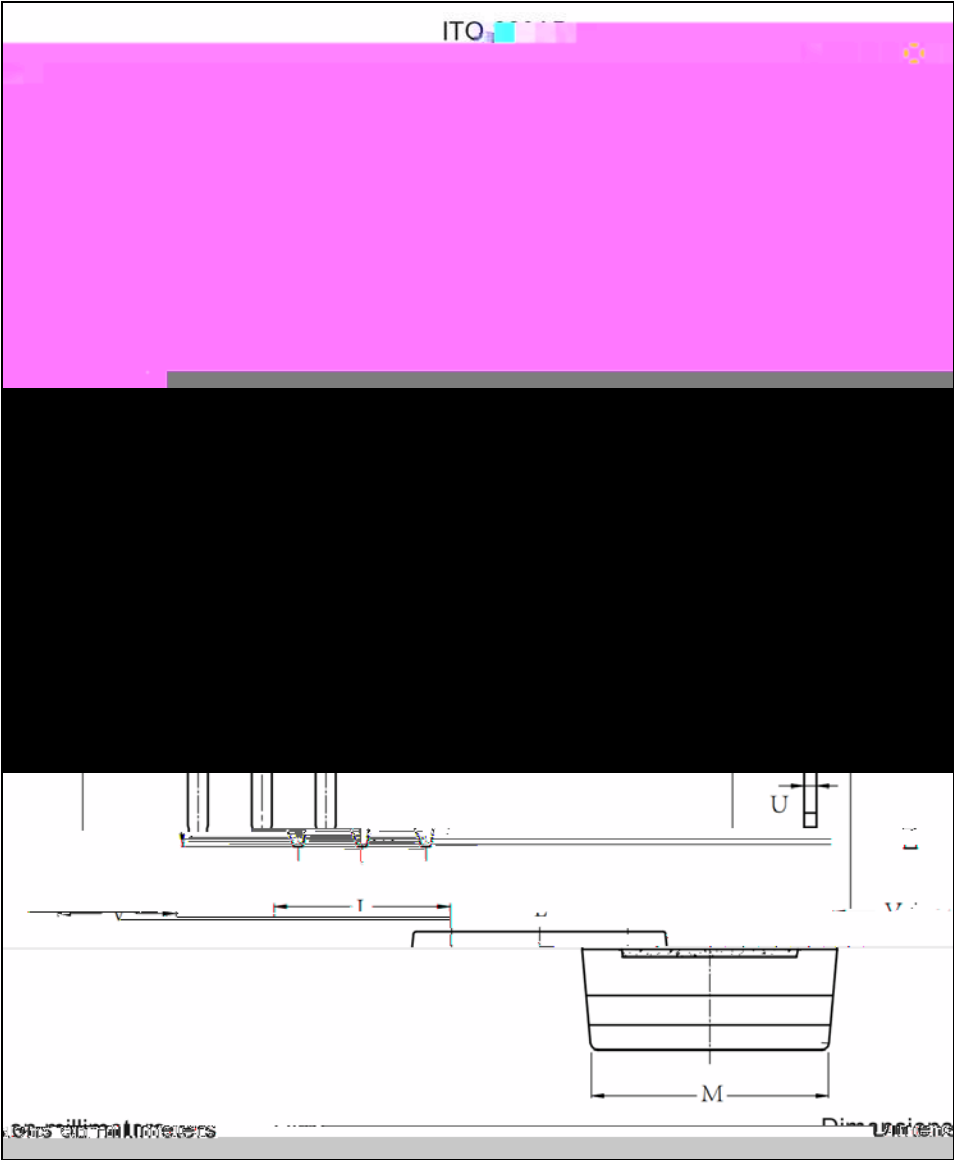

ITO-220AB		
' L P	0 L Q	0 D [
\$		
%		
&		
'		
(		
)		
*		
+	7 < 3	
,	7 < 3	
-		
.		
/		
0		
1		
2	7 < 3	
3		
4		
5		
6	7 < 3	
7		
8		
9		



MBR20F60FCTS-B1-W5094HF

Disclaimer

7KH LQIRUPDWLRQ VSHFWXHQWQW LQ WKULUDHQHJKRQFHDRQQDZHF(KQHFWURQ&LF /VHG UHV
ULJKW WR PDNLHWKHDXQHQWVSHFIRIWRVSLRQG RFWV GLVSPDURIGHKHUWOLDEWQWV L JXQ F
RU RWKHUZZLVH

7KH SURGXFWQLVGHV/KJHGL WR EHHKWHGZLRQKR HGHQSDHQW RU GHYLFHWKQGG Q
HTXLSPHQW RU GHYLFHV ZKLFK UHTXLWKHKEDIOIXQWOLRQXIDIGODBHGLWOLDKQSDQJHU
PHGLFDO LQVWUXHQMSRUWHQWLRQHUTXLSPH H QDFKHQ U UHDFWRHU FRQWUURQOHV DQ
GHYLFHV <DQJMLHVRV DQKH QH DQVXRLOV VRRWHQSDQVLEWHVROVLIQJGIDRQJMHK LP
RI VDOH

7KLV SXEOLFDWLRQ SXVSHUWIDGHVLQURUPDWSLROLSGHYLRXDGGLWLRQDO LQWRUPDWLR
KWVZLZ \DQJMLHRRRFRQVXOW \RXU QHDUHVW <DQJMLHVRVQFHQHV RILFH IRU IXUW