



Schottky Diodes

Features

- High frequency operation
- Low forward voltage drop
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Guard ring for enhanced ruggedness and long term reliability
- Solder dip 275 °C max. 7 s, per JESD 22-B106

Typical Applications

Typical applications are in switching power supplies, converters, freewheeling diodes, and reverse battery protection.

Mechanical Data

- **Package:** TO-220AB
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** As marked

■Maximum Ratings (T_a=25 °C Unless otherwise specified)

PARAMETER	FIG 1	I
Surge(Non-repetitive)Forward Current @60Hz half sine-wave, 1 cycle, T _a =25 °C	I_{FSM}	250
		20



MBRU2080CTA

■Ordering Information (Example)

PREFERED P/N	UNIT WEIGHT(g)	MINIIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
MBRU2080CTA	Approximate 1.9	50	1000	5000	Tube

■Characteristics (Typical)

FIG1:Io -Tc Curve


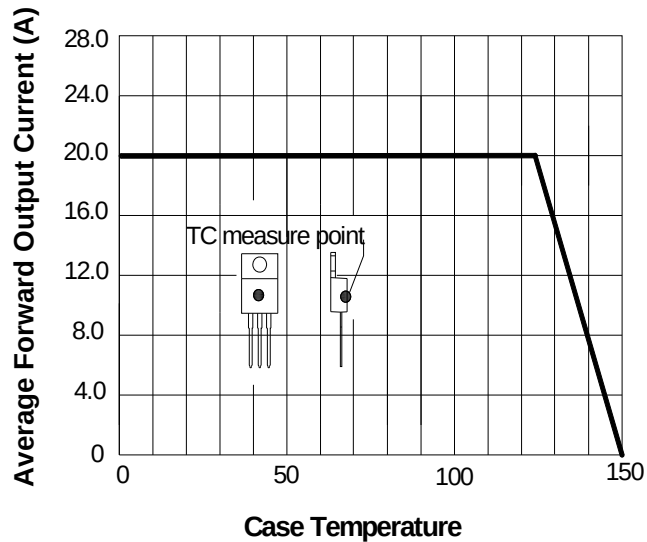


FIG3: Forward Voltage





■Outline Dimensions

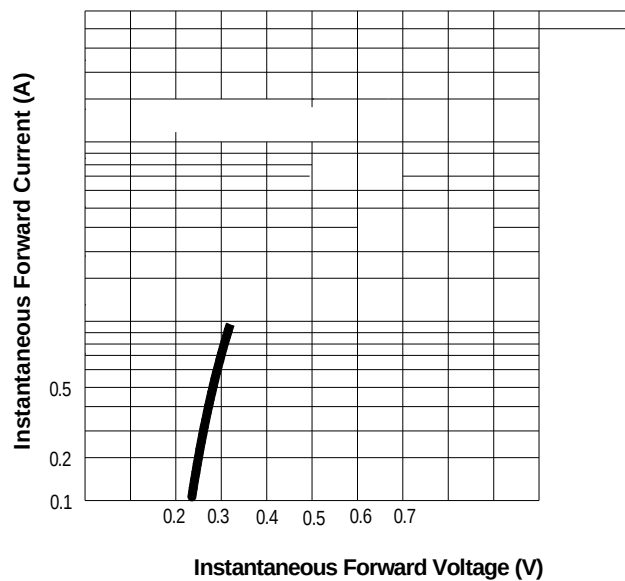