


## 4-Line, Uni-directional, Ultra-low Capacitance, Transient Voltage Suppressor

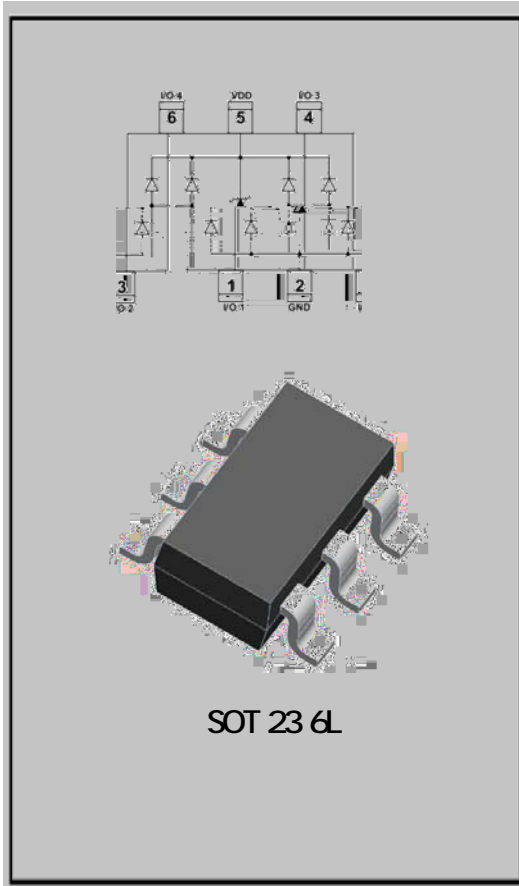

### Features


- Operating voltage: 5V
- Transient protection for each line according to
  - IEC61000-4-2(ESD):  $\pm 20\text{kV}$  (contact)
  - IEC61000-4-5(surge): 5A (8/20 $\mu\text{s}$ )
- Ultra low capacitance:  $C_j=0.65\text{pF}$  typ
- Ultra low leakage
- Low clamping voltage
- Up to 4 lines protects
- RoHS Compliant

### Applications


- USB 2.0 Power and Data lines protection
- Digital Visual Interface (DVI)
- Monitors and Flat Panel Displays
- Video Graphic Cards
- Notebook and PC Computers

### Mechanical Data

- Package: SOT-23-6L
- Lead Finish: Matte Tin
- Case Material: "Green" Molding Compound.
- Moisture Sensitivity: Level 1 per J-STD-020
- Marking Information: See Below

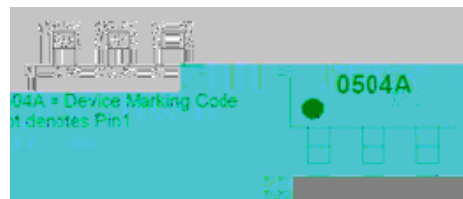

### Definitions of electrical characteristics

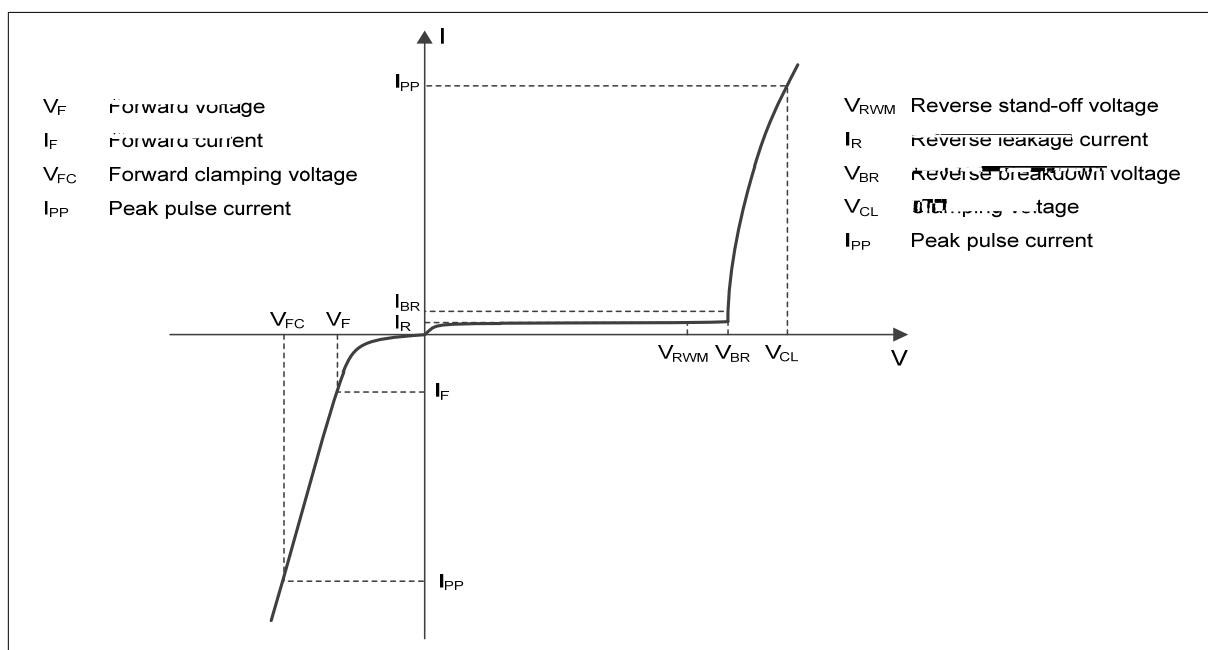

## C0504S2

SYMBOL	LIMITS	UNIT
$P_{pk}$	75	W
$I_{PP}$	5	A
$V_{ESD}$	±25	KV
	±20	
$T_J$	-55~125	°C
$T_{STG}$	-55~150	°C

ise specified


UNIT	Conditions	Min	Typ	Max
V	Any I/O pin to ground			5.0






# ESDSL0504S2

Fig.7 ESD clamping  
 (+8kV contact discharge per IEC61000-4-2)

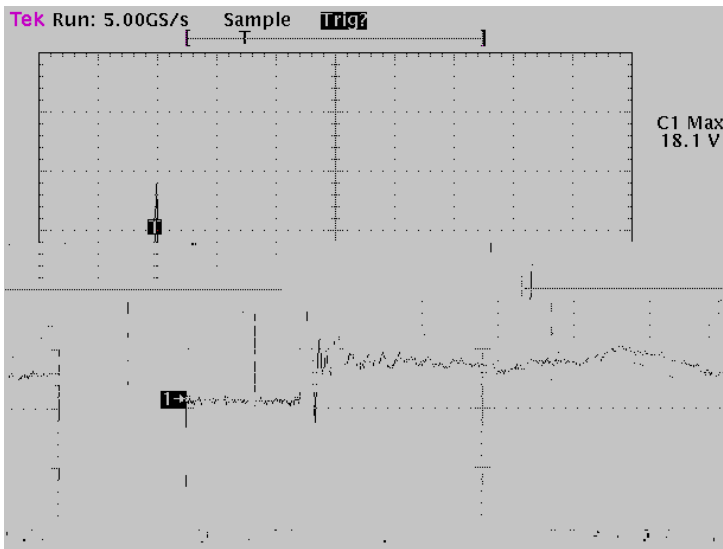

Note Data is taken With a 10x attenuator

## Outline Dimensions

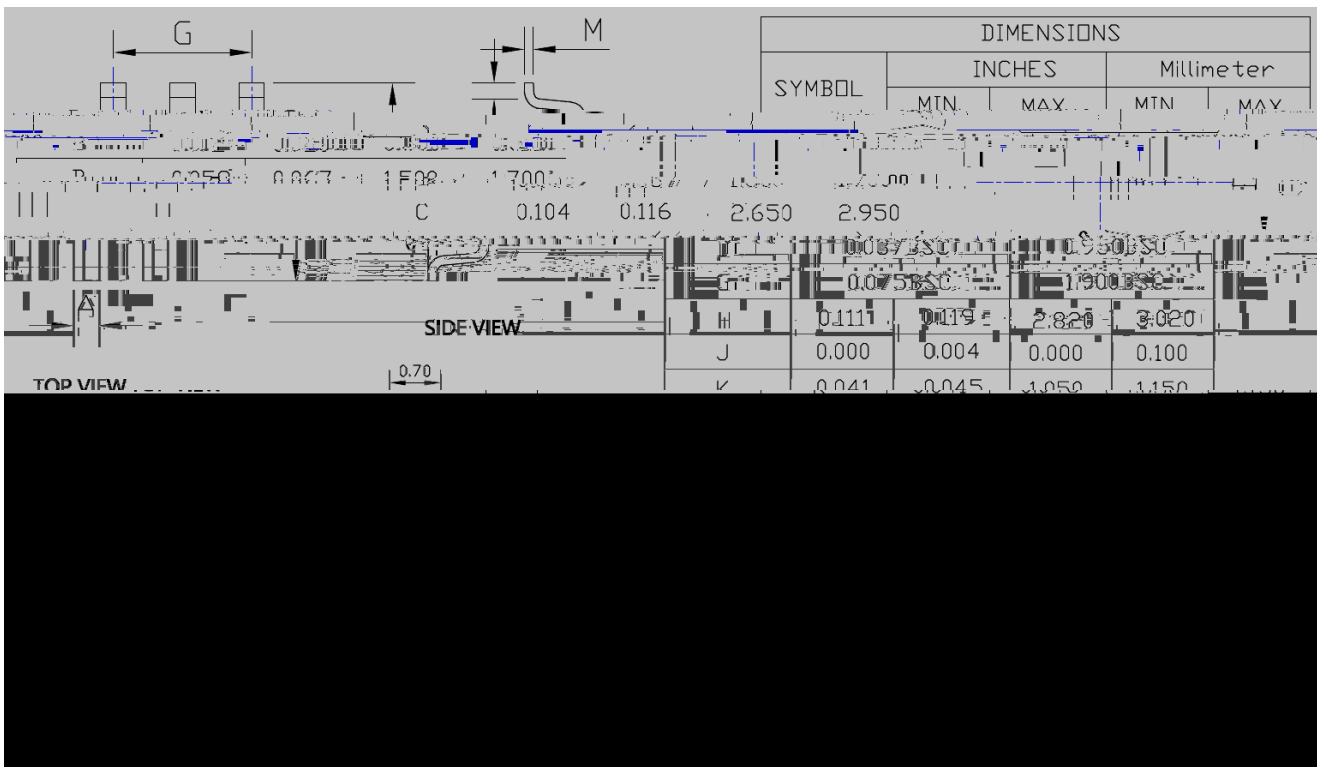



## ESDSL0504S2

---

### Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.