







($T_a=25$ Unless otherwise specified)

Typical Thermal resistance	R J-A ⁽¹⁾	/W	65								
	R J-L ⁽¹⁾		20								
	R J-C ⁽¹⁾		15								

Note:
 (1) Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with 0.2" x 0.2" (5.0 mm x 5.0 mm) copper pad areas

(Typical)

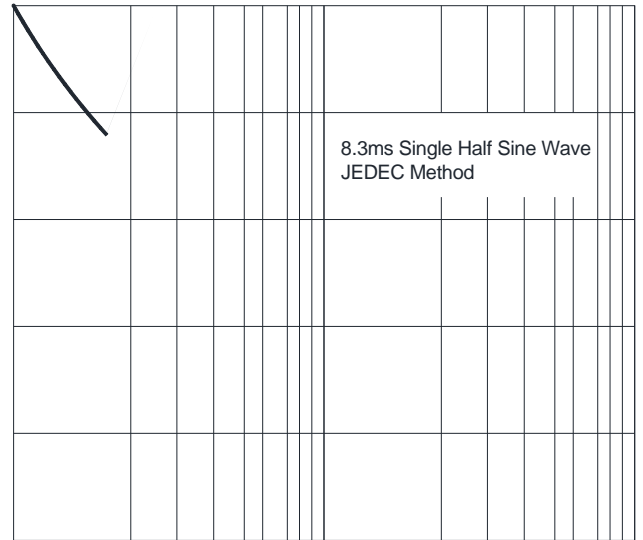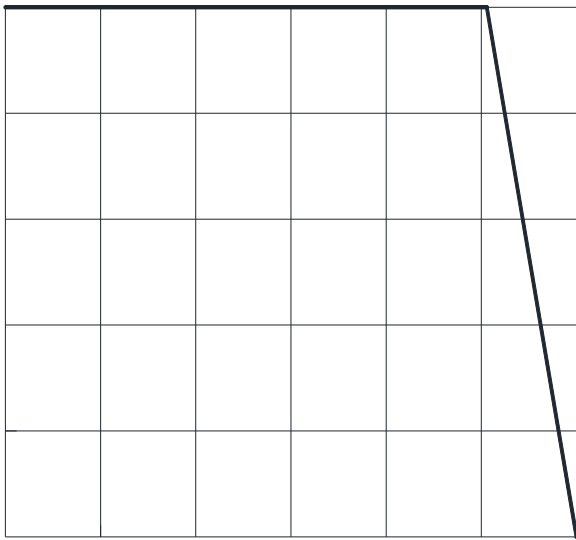


()



(Example)

G1AFS-G1MFS	F1	Approximate 0.034	3000	24000	96000	7" reel
G1AFS-G1MFS	F2	Approximate 0.034	10000	/	160000	13" reel
G1AFS-G1MFS	F3	Approximate 0.034	10000	/	120000	13" reel
G1AFS-G1MFS	F4	Approximate 0.034	7500	/	120000	13" reel

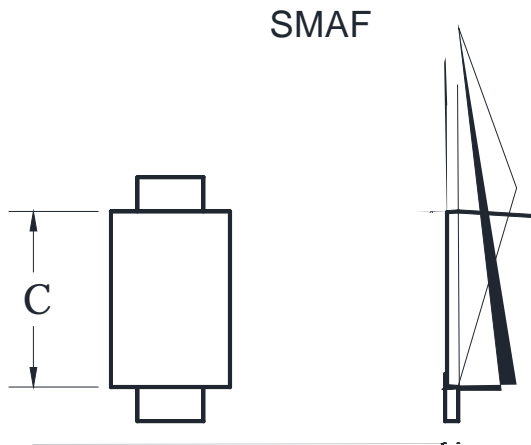

Dimensions in millimeters

Dim	Min	Max
A	2.40	2.80
B	1.35	1.45
C	3.40	3.60
D	4.40	4.80
E	1.05	1.25
F	0.50	1.00
G	0.15	0.22

Dim	Millimeters
P1	6.50
P2	4.00
P3	1.50
Q1	2.50
Q2	1.70



The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.